

AD-A145 515


CLEAN-BURNING DIESEL ENGINES(U) SOUTHWEST RESEARCH INST
SAN ANTONIO TX ARMY FUELS AND LUBRICANTS RESEARCH LAB
H E DIETZMANN AUG 83 AFLRL-169 DAAK70-82-C-0001

1/1


UNCLASSIFIED

F/G 21/7

NL

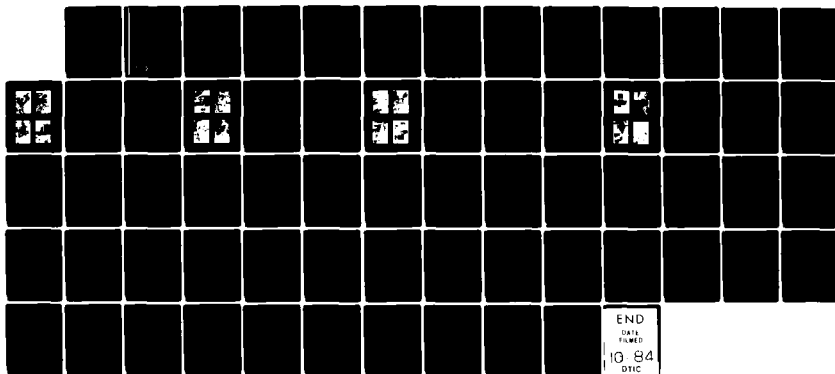

END
DATA
FILMED
10 84
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

(12)

CLEAN-BURNING DIESEL ENGINES

AD-A145 515

INTERIM REPORT AFLRL No. 169

By

**H. E. Dietzmann
Department of Emissions Research
Energy Systems Research Division
Southwest Research Institute
San Antonio, Texas**

Prepared for

**U.S. Army Fuels and Lubricants Research Laboratory
Southwest Research Institute
San Antonio, Texas**

Under Contract to

**U.S. Army Belvoir Research and Development Center
Materials, Fuels, and Lubricants Laboratory
Fort Belvoir, Virginia**

Contract No. DAAK70-82-C-0001

Approved for public release; distribution unlimited

DTIC FILE COPY

**DTIC
ELECTE
SEP 12 1984
B**

August 1983

84 09 11 055

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Trade names cited in this report do not constitute an official endorsement or approval of the use of such commercial hardware or software.

DTIC Availability Notice

Qualified requestors may obtain copies of this report from the Defense Technical Information Center, Cameron Station, Alexandria, Virginia 22314.

Disposition Instructions

Destroy this report when no longer needed. Do not return it to the originator.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFLRL No. 169	2. GOVT ACCESSION NO. 40-A145 515	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) CLEAN-BURNING DIESEL ENGINES		5. TYPE OF REPORT & PERIOD COVERED Interim Report September 1982-August 1983
		6. PERFORMING ORG. REPORT NUMBER SwRI-6800-175/1
7. AUTHOR(s) H.E. Dietzmann		8. CONTRACT OR GRANT NUMBER(s) DAAK70-82-C-0001
9. PERFORMING ORGANIZATION NAME AND ADDRESSES Department of Emissions Research, Energy Systems Research Division, Southwest Research Institute, San Antonio, TX 78284		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Belvoir Research and Development Center, Materials, Fuels, and Lubricants Lab, Ft. Belvoir VA 22060		12. REPORT DATE August 1983
		13. NUMBER OF PAGES 60
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) U.S. Army Belvoir Research and Development Center Logistics Support Lab Ft. Belvoir VA 22060		15. SECURITY CLASS (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This project was conducted for U.S. Army Belvoir Research and Development Center under a contract issued to U.S. Army Fuels and Lubricants Research Laboratory, Southwest Research Institute, San Antonio, Texas.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Forklifts Perkins 4.203.2 diesel engine Diesel engines Deutz F3L 912W diesel engine Emissions		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Gaseous and particulate emissions were measured from two diesel forklift engines under a variety of steady-state conditions. A MIL-F-46162A(MR) military referee grade fuel was used to determine CO, CO ₂ , NO _x , HC, particulate, sulfate, organic sulfides, phenols, DOAS odor, sulfur dioxide and aldehyde emission rates from a Deutz F3L 912W and a Perkins 4.203.2 diesel engine. Emission rates were reported in g/hp-hr, g/hr, and observed concentration, i.e., ppm, percent, or g/m ³ .		

FOREWORD

Work Directive 18, "Clean Burning Diesel Engines," was issued on September 13, 1982 under Contract DAAK70-82-C-0001 to the U. S. Army Mobility Equipment Research and Development Command (MERADCOM; currently the Belvoir Research and Development Center). The engineering and analytical efforts of this program were conducted by the Department of Emissions Research of Southwest Research Institute, 6220 Culebra Road, San Antonio, Texas 78284. This program was identified within Southwest Research Institute as Project 02-6800-175.

This project was under the overall supervision of Harry E. Dietzmann, manager of the Chemical Analysis Section. He was assisted by Dr. Lawrence R. Smith (chemical analysis) and Mr. Orville J. Davis (engine gaseous and particulate emissions). Emission testing was initiated in January 1983 and was completed in April 1983. Mr. Tim Lee of Belvoir Research and Development Center, STRBE-GMW, was the project technical officer, Mr. James Stephens served as the overall program manager, and Mr. M. E. LePera, Belvoir Research and Development Center, STRBE-VF, served as project coordinator.

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	7
A. Objective	7
B. Scope	8
II. DESCRIPTION OF FACILITIES, ENGINES, PROCEDURES	9
A. Engine Description	9
B. Fuel Description	13
C. Dynamometer Description	15
D. Gaseous Emissions (Group I)	15
III. ANALYTICAL PROCEDURES FOR UNREGULATED EMISSIONS	20
A. Description of the Analytical Procedures	20
B. Accuracy of the Analytical Procedures	24
IV. RESULTS	26
A. Group I - Emissions	26
B. Group II - Emissions	34
C. Group III - Emissions	42
V. SUMMARY	50
VI. RECOMMENDATIONS	52
VII. REFERENCES	55
APPENDIX -- 13-Mode Emission Results	56

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Several Views of the Deutz F3L 912W on the Test Stand	11
2	Several Views of the Perkins 4.203.2 on the Test Stand	14
3	Several Views of Gaseous and Particulate Emissions Instrumentation	17
4	Exhaust Gas Sampling and Analytical Train	19
5	Several Views of Groups II and III Sampling Systems (used with Deutz F3L 912W and Perkins 4.203.2)	21
6	Effect of Engine Load on Hydrocarbons, Carbon Monoxide, and Oxides of Nitrogen Emission Rates From a Deutz F3L 912W at Two Engine Speeds	31
7	Effect of Engine Load on Hydrocarbons, Carbon Monoxide, and Oxides of Nitrogen Emission Rates From a Perkins 4.203.2 at Two Engine Speeds	33
8	Effect of Engine Load on Particulate Emission Rates From a Deutz F3L 912W at Three Engine Speeds	37
9	Effect of Engine Load on Particulate Emission Rates From a Perkins 4.203.2 at Three Engine Speeds	38
10	Effect of Engine Load on Sulfur Dioxide Emission Rates From a Deutz F3L 912W at Three Engine Speeds	40
11	Effect of Engine Load on Sulfur Dioxide Emission Rates From a Perkins 4.203.2 at Three Engine Speeds	41
12	Effect of Engine Load on Sulfate Emission Rates From a Deutz F3L 912W at Three Engine Speeds	44
13	Effect of Engine Load on Sulfate Emission Rates From a Perkins 4.203.2 at Three Engine Speeds	45

LIST OF TABLES

<u>Table</u>	<u>Page</u>
1 Test Matrix for Deutz F3L 912W and Perkins 4.203.2 Emission Tests	8
2 Engine Break-In Schedule Used for Deutz F3L 912W and Perkins 4.203.2 (40-Hour Engine Schedule)	10
3 Deutz F3L 912W Engine Performance Data	12
4 Perkins 4.203.2 Engine Performance Data	13
5 Comparison of Test Fuel (AL-7225-F) to MIL-F-46162(MR), MIL-F-46612B(ME), and EPA D-2 Emission Specifications	16
6 List of Group I Emission Measurement Equipment	18
7 Sampling and Analysis Methodology for Unregulated Emissions	22
8 Unregulated Emission Procedural Sample Rates and Accuracy	25
9 Gaseous and Smoke (Group I) Emissions From Deutz F3L 912W Diesel Engine	27
10 Gaseous and Smoke (Group II) Emissions From Perkins 4.203.2 Engine	28
11 Summary of 13-Mode Emissions Data	29
12 Summary of Emission Rates and Concentration Minimum and Maximum Values for the Deutz F3L 912W and Perkins 4.203.2 Over Complete Test Matrix	32
13 Particulate, Sulfur Dioxide, and Sulfate (Group II) Emissions From a Deutz F3L 912W Diesel Engine	35
14 Particulate, Sulfur Dioxide, and Sulfate (Group II) Emissions From a Perkins 4.203.2 Diesel Engine	36
15 Aldehyde Emission Rates From a Deutz F3L 912W Diesel Engine (mg/hp-hr)	46

LIST OF TABLES (continued)

<u>Table</u>		<u>Page</u>
16	Aldehyde Emission Concentrations From a Deutz F3L 912W Diesel Engine (ppm)	46
17	Aldehyde and Ketone Emission Rates From a Deutz F3L 912W Diesel Engine (mg/hr)	46
18	Aldehyde Emission Rates From a Perkins 4.203.2 Diesel Engine (mg/hp-hr)	47
19	Aldehyde Emission Rates From a Perkins 4.203.2 Diesel Engine (mg/hr)	47
20	Aldehyde Emission Rates From a Perkins 4.203.2 Diesel Engine (ppm)	47
21	Summary of Aldehyde and Ketone Emission Rates From a Deutz F3L 912W and Perkins 4.203.2 Operated on a MIL-F-46162A(MR) Fuel, AL-722-5	48
22	Organic Sulfide Emission Rates From Perkins 4.203.2 (mg/hr)	49
23	Diesel Odor Analysis System (DOAS) Results for the Deutz F3L 912W and the Perkins 4.203.2	49

I. INTRODUCTION

The U. S. Army currently uses electric forklifts in handling hazardous materials. Although these electric forklifts have certain inherent desirable characteristics, i.e., no pollution or noise, the logistics involved in field operations using electric forklifts has prompted the U. S. Army to investigate possible alternatives. One alternative is the diesel engine. The diesel engine has many advantages, i.e., mobility, cost, maintenance, but there is a major concern when these vehicles are used in areas with limited ventilation.

A. Objective

The objective of this program was to obtain exhaust emission rates from two diesel engines used in forklift trucks. This emissions characterization was accomplished on engines provided by MERADCOM and included gaseous and particulate emissions of potential concern when these diesel forklift trucks are operated in confined areas such as ammunition storage igloos. The method used to evaluate these engines was the modal steady-state procedure used in the 13-mode Federal Test Procedure.(1)*

This project is the first step in defining the limits of acceptability for using diesel forklift trucks in areas of limited ventilation. The end use of these data will allow comparisons between engines; allow the Army to evaluate the emission rates versus Threshold Limit Values (TLV) from OSHA standards for the selected contaminants; identify and rank order contaminants from the engine in terms of priority of importance in worker health and well-being; and provide a data base from which a procurement specification for forklift diesel engines can be established.

B. Scope

The two diesel forklift engines provided by MERADCOM for this study were a Deutz F3L 912W and a Perkins 4.203.2. The test fuel was a MIL-F-46162A(MR) provided

*Underscored numbers in parentheses designate references at the end of this report.

by the U. S. Army Fuels and Lubricants Research Laboratory (AFLRL) at Southwest Research Institute. Emissions characterization was accomplished on both engines over the test matrix presented in Table 1. Emission rates are reported in g/hp-hr, g/hr and observed concentrations, i.e., ppm, percent, or $\mu\text{g}/\text{m}^3$.

TABLE 1. TEST MATRIX FOR DEUTZ F3L 912W AND PERKINS 4.203.2 EMISSION RESULTS AND PROCEDURES

Power, % Max hp at Speed	Engine Speed, rpm			
	Curb Idle	Intermediate	Peak Torque	Rated hp
2	I II III	I II III	I II III	I II III
7	NR	I	I	I
12-1/2	NR	I	I	I
25	I II	I II	I II	I II
37-1/2	NR	I	I	I
50	NR	I II III	I II III	I II III
75	NR	I	I	I
100	NR	I II III	I II III	I II III

Group	Emissions Measured/Included
I	HC, CO, CO ₂ , NO _x (NO + NO ₂), Smoke, 12 Test Conditions Group I alone
II	Particulates, Sulfates, and SO ₂ , 4 Test Conditions for Groups I and II
III	Aldehydes (includes Acrolein), Odor TIA by DOAS, Phenols, Organic Sulfides, 6 Test Conditions for Groups I, II, and III

NR denotes Not Required

II. DESCRIPTION OF FACILITIES, ENGINES, PROCEDURES

A. Engine Description

This program involved emission mapping for gaseous, particulate, and unregulated emissions from two diesel engines that are candidates for use in forklift trucks to be used in handling hazardous materials. The two engines were made available for the entire duration of the program and were provided in new condition.

1. Deutz Engine Description


The first engine tested in this research effort was a three-cylinder, air-cooled Deutz F3L 912W. This engine is rated at 48 hp at 2650 rpm. A new test engine supplied by MERADCOM was delivered to Southwest Research Institute in December 1982. The engine was installed on the test stand, and an engine performance map was obtained. Results of the performance map indicated that there were apparent problems with the engine. Concerns over testing the engine were relayed to MERADCOM and Deutz technical and field service representatives. Deutz representatives concurred that the engine was not in satisfactory operation condition and that it was not appropriate to test that engine. The engine was shipped to Deutz (Atlanta) for diagnostics, and the results of the engine inspection were reported to the MERADCOM Project Officer.

A new replacement engine was provided by Deutz and was installed on the test stand. Results from the performance map on the replacement Deutz F3L 912W were satisfactory, although the engine produced 44 hp instead of the 48 hp at 2650 rpm. The 80-hour engine break-in and emission test program proceeded without incident until program completion. The engine "break-in" schedule is presented in Table 2. Several views of the Deutz F3L 912W on the test stand are illustrated in Figure 1. The engine performance data for the Deutz F3L 912W are presented in Table 3.


TABLE 2. ENGINE BREAK-IN SCHEDULE USED FOR DEUTZ F3L 912W
AND PERKINS 4.203.2 (40-HOUR ENGINE SCHEDULE)

Step	Time per Step	Total Time, hr	Deutz F3L 912W		Perkins 4.203.2	
			RPM	Load, lb	RPM	Load, lb
1	0:30	0:30	800	15	800	18
2	0:30	1:00	1200	25	1200	30
3	1:00	2:00	1400	25	1400	30
4	1:00	3:00	1600	25	1600	30
5	1:00	4:00	1800	40	1800	48
6	1:00	5:00	2000	38	2000	45
7	7 hours cycling (Total time: 12:00 hours)	0:05	800	0	--	--
		0:25	1200	33	1200	40
		0:05	800	0	--	--
		0:25	1600	33	1600	40
8	8 hours cycling (Total time: 20:00 hours)	0:05	1200	0	--	--
		0:25	1800	48	1800	57
		0:05	1200	0	--	--
		0:25	2200	45	2200	54
9	10 hours cycling (Total time: 30:00 hours)	0:15	1200	41	1200	50
		0:15	1600	42	1600	50
		0:15	1400	42	1400	52
		0:15	1800	40	1800	48
10	10 hours cycling (Total time: 40:00 hours)	0:15	1600	50	1600	60
		0:15	2200	37	2200	45
		0:15	2000	39	2000	45
		0:15	2600	41	2400	53


General Comments: A Gulf 2D fuel (EM-409-F, tank 6) was used for engine break-in; Mobil Del Vac was the engine oil used. The 40-hour break-in was run twice on both engines to give 80 hours on each engine. Engine was stopped every 8 hours for oil check, belt tension check, etc. Engine oil was changed at 40 and 80 hours. Engine data recorded included air, fuel and oil temperatures, fuel rate, beam load, engine rpm, and time of day.

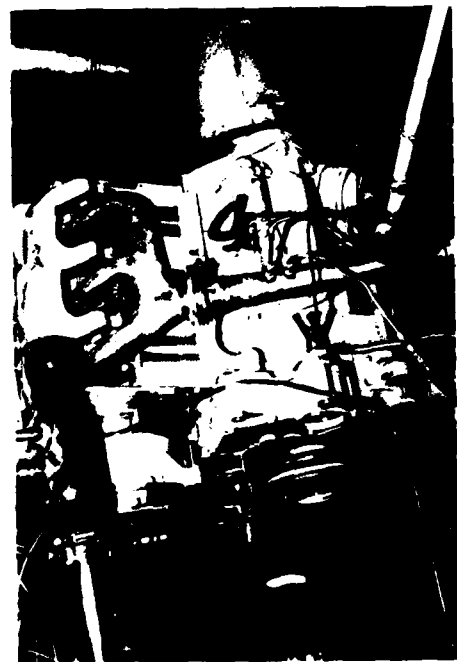


Port View of Deutz F3L 912W

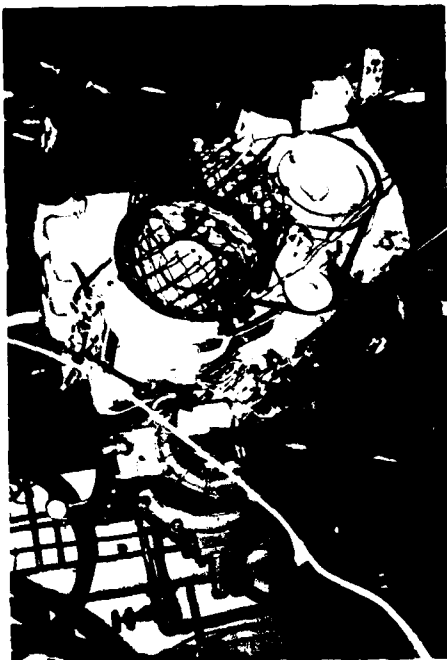

Starboard View Deutz F3L 913

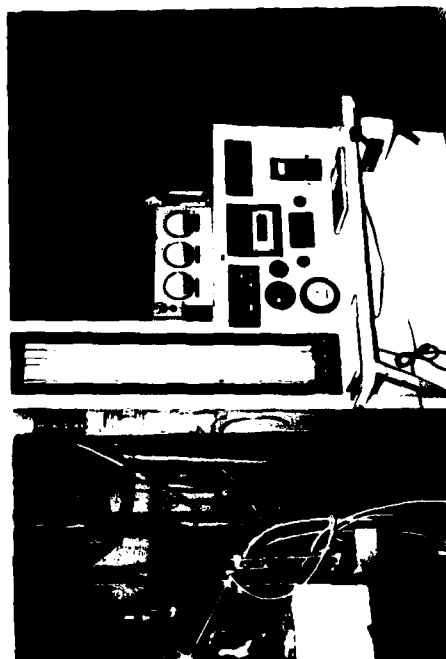

Control Console

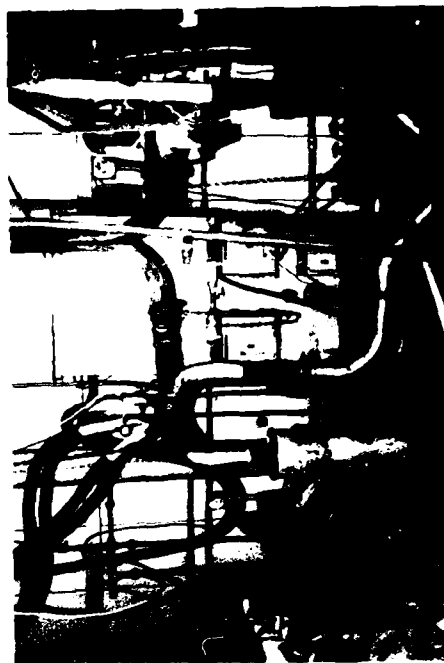

Exhaust System

FIGURE 1. SEVERAL VIEWS OF THE DEUTZ F3L 912W ON THE TEST STAND

TABLE 3. DEUTZ F2L 912W ENGINE PERFORMANCE DATA

<u>Engine RPM</u>	<u>Dyno Load, lb</u>	<u>Engine, hp</u>	<u>Fuel Rate, lb/hr</u>	<u>Exhaust Temperature, °F(°C)</u>
1200	82.0	25.01	10.91	911(533)
1400	83.0	29.05	11.92	1015(546)
1600	83.5	33.40	14.00	1033(556)
1800	80.0	36.00	14.60	1023(551)
2000	77.7	38.85	15.96	1016(547)
2200	74.2	40.81	17.17	1015(546)
2400	71.4	42.84	18.30	1030(554)
2600	67.5	43.88	19.93	1045(563)
2650	64.8	42.93	20.01	1017(547)

Idle Speed = 596 rpm
High Idle Speed = 2761 rpm

General Comments: Engine was run using air cleaner supplied by MERADCOM. Engine ran very good, no vibration from idle to high idle speed. No engine crankcase blowby was observed.

2. Perkins Engine Description

The second engine was a four-cylinder, water-cooled Perkins 4.203.2 diesel engine rated at 59 hp at 2500 rpm. The engine was run using the inlet and exhaust restrictions provided by the Perkins representatives. The 80-hour engine break-in on the Perkins 4.203.2 is presented in Table 2, and engine performance data are presented in Table 4. The engine was received in satisfactory operating condition and underwent the 80-hour engine break-in and emission test program without incident. The test engine produced 53 hp instead of the rated 59 hp at 2500 rpm. Figure 2 illustrates the Perkins 4.203.2 on the test stand. Both engines were tested without alternators.

TABLE 4. PERKINS 4.203.2 ENGINE PERFORMANCE DATA

<u>Engine RPM</u>	<u>Dyno Load, lb</u>	<u>Engine, hp</u>	<u>Fuel Rate, lb/hr</u>	<u>Exhaust Temperature, °F(°C)</u>
900	93.8	21.15	7.75	849(454)
1100	98.3	27.03	10.20	905(485)
1300	101.5	32.99	11.88	968(520)
1500	103.5	38.81	13.60	993(534)
1700	97.0	41.23	14.60	981(527)
1900	92.5	43.94	16.62	989(532)
2100	91.8	48.20	17.70	1021(549)
2400	88.9	51.12	19.53	1058(570)
2500	85.0	53.13	22.00	1190(643)


Idle Speed = 500 rpm
High Idle Speed = 2785 rpm

General Comments: No problems with engine installation, engine 80-hour break-in, or during emission testing.


B. Fuel Description

The original intent of this program provided for the emission testing to be conducted using a 1-percent sulfur MIL-F-46162B(ME) supplied by the U. S. Army Fuels and Lubricants Research Laboratory (AFLRL) at Southwest Research Institute. At the time testing was to begin, it was determined that AFLRL did not have any of the MIL-F-46162B(ME) nor were there immediate plans to obtain any. However, AFLRL did have MIL-F-46162A(MR). To have acquired the MIL-F-46162B(ME) fuel would have required several additional weeks.

In reviewing the fuel specifications for sulfur content, it was apparent that the 1-percent sulfur level was three to four times higher than fuel sulfur in commercial or military fuels. In order to reach the 1-percent sulfur level, it would be necessary to add abnormally large amounts of tertiary butyl disulfide. With the interest in trace organic sulfides and diesel odor in the exhaust, it was recommended that

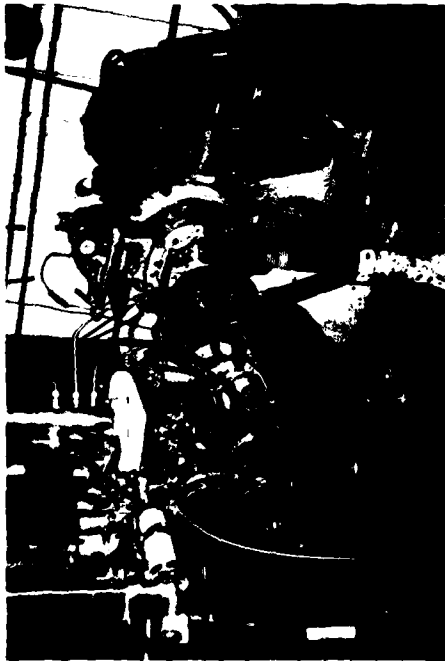


Port View of Perkins 4.203.2

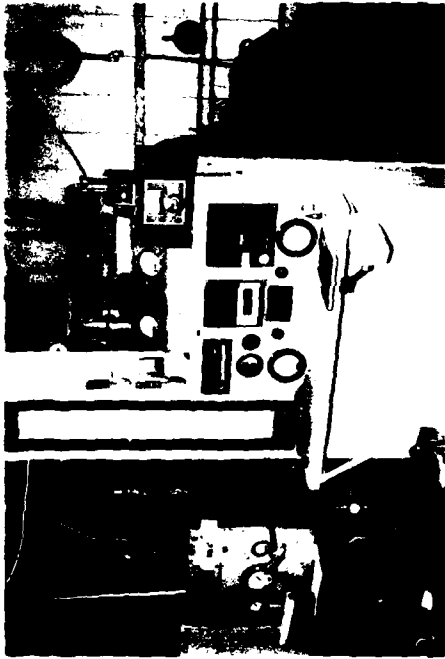

Control Console



Intake Air Measurement System

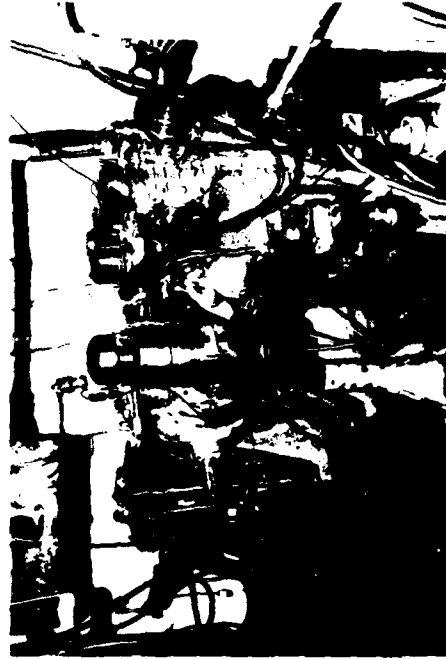

Starboard View of Perkins 4.203.2

FIGURE 2. SEVERAL VIEWS OF THE PERKINS 4.203.2 ON THE TEST STAND

emission tests be conducted with a currently available referee grade fuel, namely MIL-F-46162A(MR). The MIL-F-46162A(MR) fuel specifications are similar if not identical in most aspects to the EPA D-2 emission certification fuel specifications. Table 5 summarizes the fuel specifications of MIL-F-46162A(MR), MIL-F-46162B (ME), and EPA D-2 certification fuel, as well as actual fuel analysis of the fuel used on this program.

Emission tests conducted on high-sulfur fuels (i.e., 1-percent sulfur) would probably produce proportionately higher sulfur dioxide and sulfate. The amount and nature of trace organic sulfides could be influenced by the specific sulfur additive if large quantities were added to increase the fuel sulfur, although no experimental data are available for confirmation. With concurrence of the Project Officer, all emission tests were conducted with MIL-F-46162A(MR) instead of the originally proposed MIL-F-46162B(ME).

C. Dynamometer Description

A 250-hp Midwest wet gap eddy current dynamometer determined the load on the Deutz F3L 912W, and an adjacent 175-hp Midwest dry gap eddy current dynamometer measured the engine load on the Perkins 4.203.2. Fuel was measured using a Flotron. An 8-inch stainless steel dilution tunnel was used to collect particulate samples. All equipment was calibrated prior to testing using accepted applicable procedures, i.e., Federal Register, SAE, EPA Recommended Practice, etc. Several views of the test equipment are illustrated in Figure 3.

D. Gaseous Emissions (Group I)


The measurement of gaseous emissions was accomplished using analytical equipment, procedures, and calculations specified in the Federal Register for 13-mode certification testing. The specific analytical instruments used in this study are listed in Table 6, and several views of this equipment are also illustrated in Figure 3. A flow schematic of the gaseous emissions instrumentation is shown in Figure 4.

One set of gaseous, particulate, and unregulated emissions instrumentation was used to obtain emissions data on this program. The proximity of the two test stands and the common exhaust allowed ready changing between the Deutz F3L 912W and the Perkins 4.203.2 engines.


TABLE 5. COMPARISON OF TEST FUEL (AL-7225-F) to MIL-F-46162A(MR), MIL-F-46162B(ME), and EPA D-2 EMISSION SPECIFICATIONS

	Fuel Specifications			Fuel Analysis AL-7225-F
	MIL-F-46162A(MR)	MIL-F-46162B(ME)	EPA D-2 Emissions	
Gravity, °API	33-37	NA	33-37	36.1
Density, g/mL	0.84-0.85	Report	NA	0.844
Flash Point, °C	>56	Report	>49	60
Cloud Point, °C	<-13	<-13	NA	-21
Pour Point, °C	<-18	<-18	NA	-24
Viscosity, cSt, @ 40°C	2.2-3.2*	1.9-4.1	2.0-3.2*	2.2
Distillation, °C				
IBP	171-204	Report	171-204	166
10% Recovered	204-238	Report	204-238	219
50% Recovered	243-282	245-285	243-282	244
90% Recovered	288-321	330-357	288-321	296
EBP	304-349	<385	304-349	358
Carbon Residue (10% Bottom)	<0.20	<0.20	NA	0.15
Ash, wt%	<0.02	0.02 max	NA	0.01
Cu Strip Corrosion	Report	1 max	NA	1A
Acceleration Stability, mg/100 mL	1.0 max	1.5 max	NA	0.60
Neutral Number	≤ 0.01	< 0.2	NA	0.01
Aromatics, vol%	≥ 27.0	Report	> 27.0	27.5
Sulfur, %	0.35-0.70	0.95-1.05	0.2-0.5	0.35
Cetane Number	> 42	40-45	42-50	48


*Viscosity at 37.8°C(100°F)

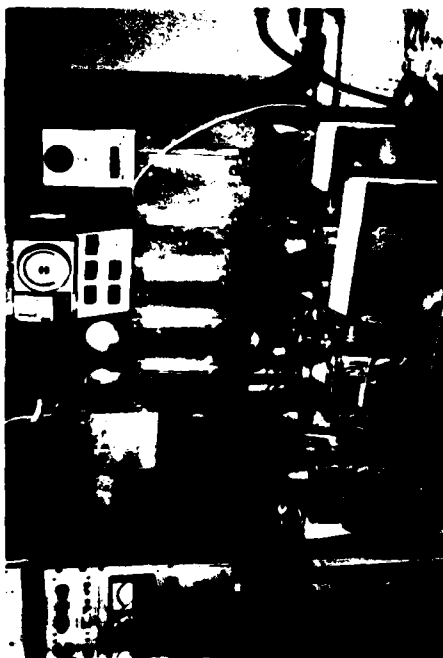

Particulate Sampling Controls

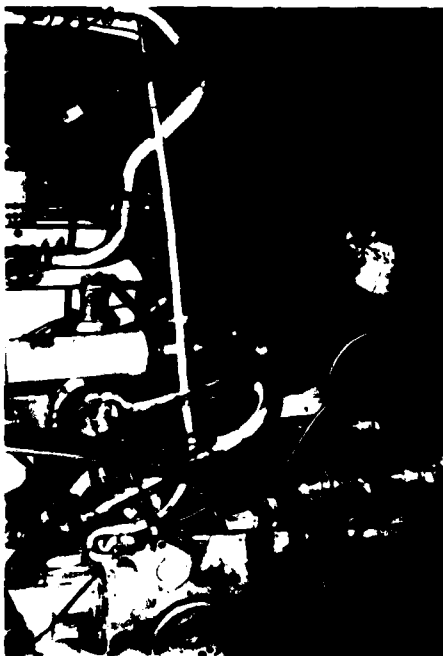

Dilution Tunnel

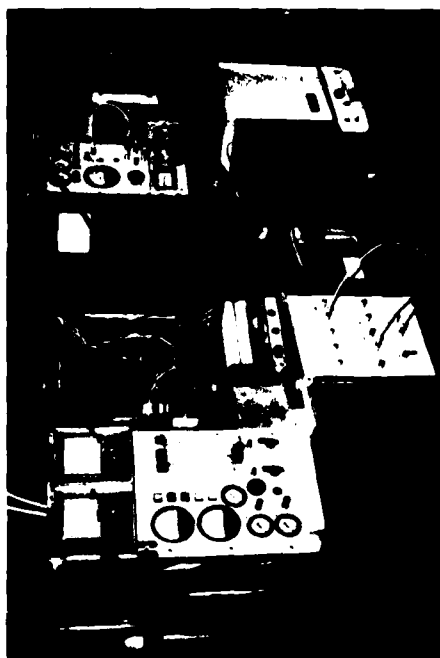

Gaseous Emissions Cart



Heated Interface

FIGURE 3. SEVERAL VIEWS OF GASEOUS AND PARTICULATE EMISSIONS INSTRUMENTATION

TABLE 6. LIST OF GROUP I EMISSION MEASUREMENT EQUIPMENT

<u>Exhaust Species</u>	<u>Chemical Symbol</u>	<u>Detection Technique</u>	<u>Instrument</u>
Carbon Monoxide	CO	NDIR ^a	Beckman 315
Carbon Dioxide	CO ₂	NDIR ^a	Beckman 315
Oxides of Nitrogen	NO _x	CL ^b	SwRI w/EPA Design
Hydrocarbons	HC	FID ^c	SwRI w/Beckman 402 Detector
Smoke	---	Opacity	PHS Smokemeter

^aNDIR denotes nondispersive infrared

^bCL denotes chemiluminescent analyzer

^cFID denotes flame ionization detector

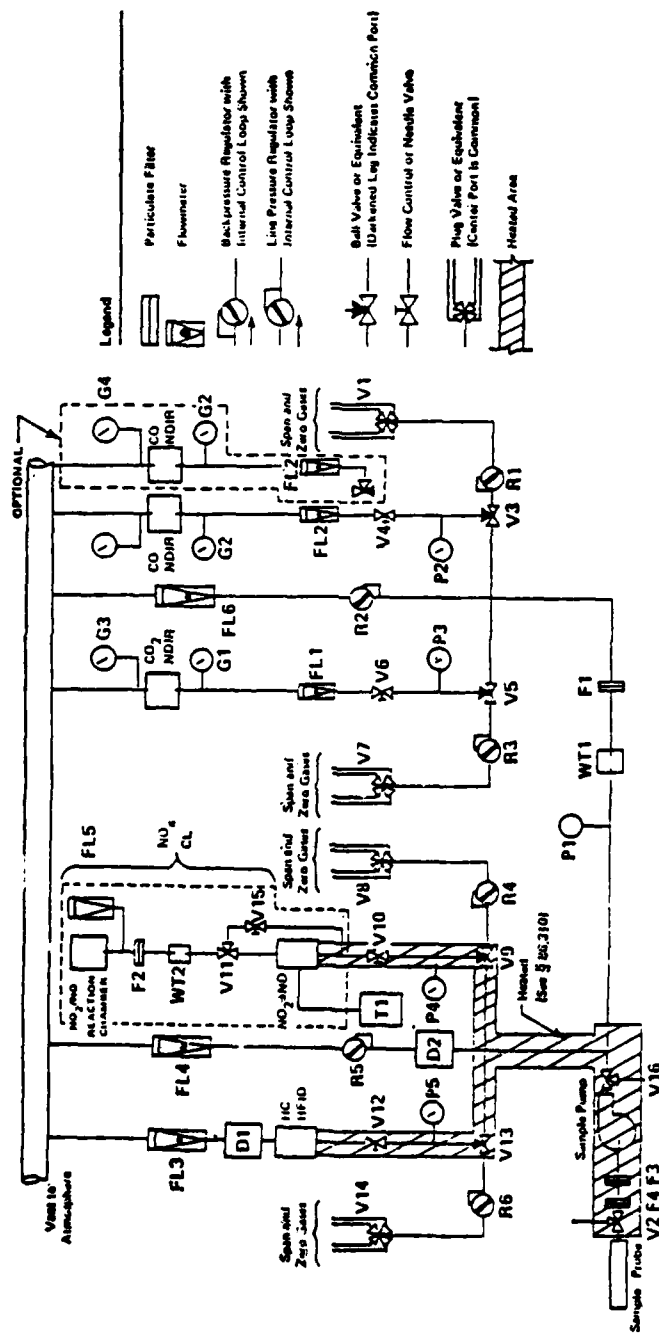


FIGURE 4. EXHAUST GAS SAMPLING AND ANALYTICAL TRAIN

III. ANALYTICAL PROCEDURES FOR UNREGULATED EMISSIONS


The analytical procedures used to measure the unregulated emissions are summarized in this section. Detailed descriptions of most of the procedures, along with discussions of their development, validation, and qualification, are available in Interim Report II, "Analytical Procedures for Characterizing Unregulated Pollutant Emissions From Motor Vehicles," developed in a related EPA project.^(2,3) Several views of Group I, II, and III sampling systems are shown in Figure 5.

A. Description of Analytical Procedures


The unregulated emissions evaluated in this project, along with the methods for sampling and the procedures used in the analyses, are listed in Table 7. Aldehydes and ketones, organic sulfides, and phenols represent groups of compounds. The respective procedures separate and identify a number of individual components within each of these groups. The analytical procedures involved in this project are briefly described in the following subsections.

1. Aldehydes and Ketones

The collection of aldehydes (formaldehyde, acetaldehyde, acrolein, propionaldehyde, crotonaldehyde, isobutyraldehyde, benzaldehyde, and hexanaldehyde) and ketones (acetone and methylethylketone) is accomplished by bubbling exhaust through glass impingers containing 2,4 dinitrophenylhydrazine (DNPH) in dilute hydrochloric acid. The aldehydes and ketones (also known as carbonyl compounds) react with the DNPH to form their respective phenylhydrazone derivatives. These derivatives are insoluble or only slightly soluble in the DNPH/HCl solution and are removed by filtration followed by pentane extractions. The filtered precipitate and the pentane extracts are combined, and then the pentane is evaporated in a vacuum oven. The remaining dried extract contains the phenylhydrazone derivatives. The extract is dissolved in a quantitative volume of methanol, and a portion of this dissolved extract is injected into a liquid chromatograph and analyzed for several individual aldehydes and ketones using an ultraviolet detector.

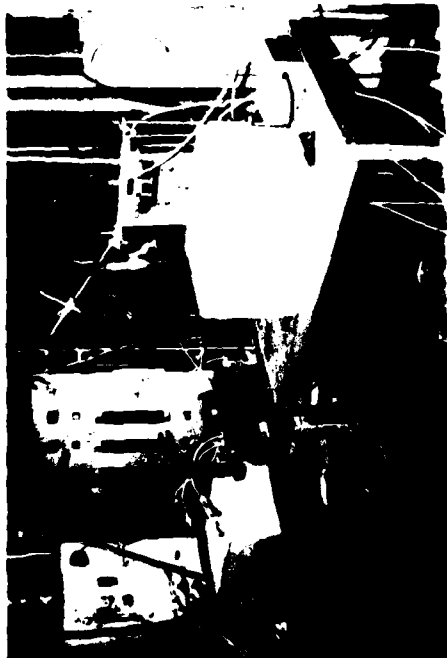


Aldehydes and Phenols

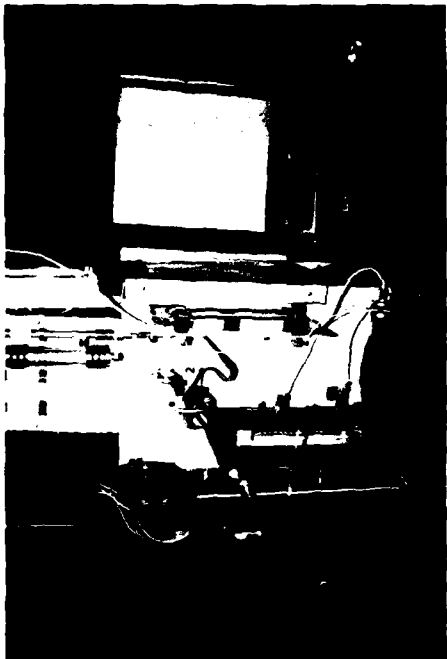

DOAS Odor



Particulate/Sulfate

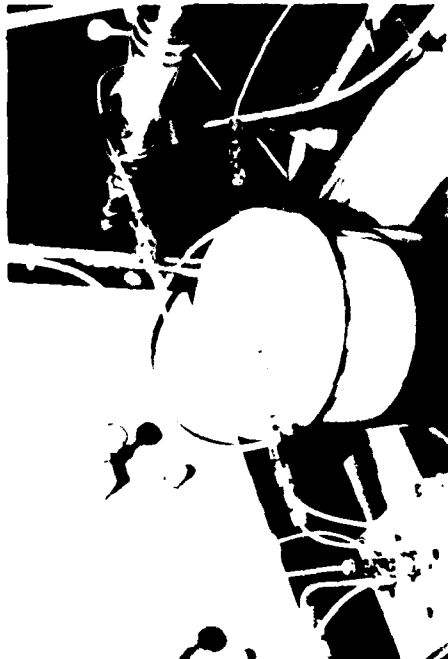

Organic Sulfides

FIGURE 5. SEVERAL VIEWS OF GROUP II AND III SAMPLING SYSTEMS
(USED WITH DEUTZ F3L 912W AND PERKINS 4.203.2)

TABLE 7. SAMPLING AND ANALYSIS METHODOLOGY
FOR UNREGULATED EMISSIONS

<u>Compound</u>	<u>Sampling</u>	<u>Method of Analysis</u>
Aldehydes and Ketones	Impinger	Dinitrophenylhydrazone derivative. Liquid chromatograph with ultraviolet detector (LC-UV)
Sulfur Dioxide	Impinger	Ion chromatograph
Carbonyl Sulfide (COS) and Organic Sulfides	Trap	Gas Chromatograph with flame photometric detector (GC-FPD)
Sulfate	47-mm filter	Barium Chloranilate derivative (BCA). Liquid Chromatograph with ultraviolet detector (LC-UV)
Particulates	47-mm filter	Weighed using microbalance
Phenols	Impinger	Gas Chromatograph with flame ionization detector (GC-FID)
DOAS	Trap	Liquid Chromatograph with ultraviolet detector (LC-UV)

2. Sulfur Dioxide

The concentration of sulfur dioxide in exhaust is determined as sulfate using an ion chromatograph. Sulfur dioxide is collected and converted to sulfate by bubbling dilute exhaust through two glass impingers containing 3-percent hydrogen peroxide absorbing solution. The samples are analyzed on the ion chromatograph and compared to standards of known sulfate concentrations.

3. Carbonyl Sulfide and Organic Sulfides

The collection of carbonyl sulfide (COS) and the organic sulfides, methyl sulfide [dimethylsulfide (CH₃)₂S], ethyl sulfide [diethylsulfide (C₂H₅)₂S] and methyl disulfide [dimethyl disulfide (CH₃)₂S₂], is accomplished by passing exhaust through Tenax GC traps at -76°C. At this temperature, the traps remove the organic sulfides from the exhaust. The organic sulfides are thermally desorbed from the

traps into a gas chromatograph sampling system and injected into a gas chromatograph equipped with a flame photometric detector for analysis. External organic sulfide standards generated from permeation tubes are used to quantify the results.

4. Sulfate

The exhaust is vented into a dilution tunnel where it is mixed with a stream of filtered room air. In the tunnel, the SO_3 reacts rapidly with water in the exhaust to form sulfuric acid aerosols. The aerosols grow to a filterable size range within the tunnel and are collected on a fluorocarbon membrane filter. Particulate sulfate salts are also collected on the filter.

Sulfuric acid collected on the filter is then converted to ammonium sulfate by exposure to ammonia vapor. The soluble sulfates are leached from a filter with a measured volume of an isopropyl alcohol-water solution (60 percent IPA). A fixed volume of the sample extract is injected into a high-pressure liquid chromatograph (HPLC) and pumped through a column of strong cation exchange resin in Ag^+ form to scrub out the halides (Cl^- , Br^-) and then through a column of strong cation exchange resin in H^+ form to scrub out the cations and convert the sulfate to sulfuric acid. Passage through a reactor column of barium chloranilate crystals precipitates out barium sulfate and releases the highly UV-absorbing chloranilate ions. The amount of chloranilate ions released is equivalent to the sulfate in the sample and is measured by a sensitive liquid chromatograph UV detector at 310-313 nanometers. All the reactions and measurement take place in a flowing stream of 60 percent IPA. The scrubber and reactor columns also function as efficient filter media for any solid reaction products formed during passage of the sample through the column system.

5. Particulate

The "particulate" is collected on 47-mm Pallflex filters. The amount of "particulate" collected is determined by weighing the filter on a microbalance before and after sampling.

6. Phenols

Phenols (phenol; salicylaldehyde; m-cresol/p-cresol; p-ethylphenol/2-isopropylphenol/2,3-xyleneol/3,5-xyleneol/2,4,6-trimethylphenol; 2,3,5-trimethylphenol; and 2,3,5,6-tetramethylphenol) in exhaust are sampled and quantitatively analyzed with a gas chromatograph (GC) equipped with a flame ionization detector. The exhaust is passed through two Greenburg-Smith impingers in series, each containing 200 mL of 1 N KOH chilled in an ice bath. The contents of each impinger are acidified and extracted with diethyl ether. The samples are partially concentrated, combined, and then further concentrated to about 1 mL. An internal standard is added, and the volume is adjusted to 2 mL. The final sample is analyzed by the use of a GC, and concentrations of individual phenols are determined by comparison to external and internal standards.

7. Diesel Odor Analysis System (DOAS)

The DOAS separates and measures the quantity of the odorous components present in a collected diesel exhaust sample eluted from an exhaust sampling trap charged with Chromosorb 102. The separation is achieved by liquid-column chromatography on a silica-type adsorbent, and the detection unit is a UV detector sensitive to 254-mm radiation.

B. Accuracy of the Analytical Procedures

A difficult, but very important, endeavor was the determination of procedural accuracy for each analytical method. The primary difficulty involved those procedures in which the exhaust compounds are trapped or absorbed, an extraction or subsequent reaction is performed, and then a portion of the extraction is analyzed. The decision was reached to initially define the accuracy in terms of a "minimum detection value" (MDV). The MDV, as used in this report, is defined as the value above which it can be said that the compound has been detected in the exhaust (i.e., at a measured value equal to the MDV, the accuracy is equal to plus or minus the MDV). Determination of accuracy over the entire range of each procedure was beyond the scope of this project.

For compounds collected by bag samples, the MDV was determined from the instrument detection limits only, and is independent of the sampling rate and duration. For compounds which are concentrated in impingers or traps, the MDV is dependent on the instrument detection limit, chemical workup, sampling rate, and sampling duration. The MDV's listed in Table 8 were derived using the listed sampling rate and a 10-minute sampling period.

TABLE 8. UNREGULATED EMISSION PROCEDURAL SAMPLE RATES AND ACCURACY

	Sample Flow, L/min	Procedural Minimum Detection Values		MDV for 10 min SS Test, mg/hour
		ppm	$\mu\text{g}/\text{m}^3$	
<u>Aldehydes and Ketones</u>	4			
Formaldehyde		0.01	15	2
Acetaldehyde		0.01	20	2
Acrolein		0.01	25	3
Propionaldehyde		0.01	25	3
Acetone		0.01	25	3
Crotonaldehyde		0.01	30	3
Isobutryaldehyde		0.01	30	3
Methylethylketone		0.01	30	3
Benzaldehyde		0.01	45	5
Hexanaldehyde		0.01	40	5
<u>Sulfur Dioxide</u>	4	0.05	135	15
<u>Organic Sulfides</u>	0.13			
Carbonyl Sulfide		0.001	3	<1
Methyl Sulfide		0.001	3	<1
Ethyl Sulfide		0.001	3	<1
Methyl Disulfide		0.001	5	<1
<u>Sulfate</u>	14	<0.01	6	<1
<u>Particulate</u>	14	----	<50	<5
<u>Phenols</u>	14			
Phenol		0.03	125	15
Salicylaldehyde		0.03	150	15
m-/p-cresol		0.02	100	10
Five phenols*		0.02	250	30
2-n-Propylphenol		0.05	75	10
2,3,5-Trimethylphenol		0.01	50	5
2,3,5,6-Tetramethylphenol		<0.01	25	5

*Includes sum of p-ethylphenol + 2-isopropylphenol + 2,3-xyleneol + 3,5-xyleneol + 2,4,6-trimethylphenol

IV. RESULTS

This section presents the results of emission tests conducted on both engines for Group I (CO, CO₂, NO_x, HC, smoke), Group II (particulates, sulfur dioxide, sulfate), and Group III (organic sulfides, DOAS odor, phenols, and aldehydes).

A. Group I--Emissions

Gaseous and smoke emissions were obtained at each engine load and speed in the test matrix shown in Table 1. The specific steady-state speed and load combinations were selected to represent the range of possible forklift operation and would serve to identify emission trends on both engines. Group I emission results for the Deutz F3L 912W are presented in Table 9, with brake specific emission rates being expressed in g/hp-hr and mass emissions (g/hr) as well as observed concentrations. Table 10 provides similar Group I emissions data from the Perkins 4.203.2 engine.

1. 13-Mode Emission Results

The test matrix of this program included the steady-state test conditions of an EPA 13-mode emissions test. These data were processed to provide 13-mode emissions results for both engines, which provides a comparison of engines using a reference test procedure. The computer printout of the 13-mode emissions data is presented in the appendix. These data are summarized for both engines in Table 11. In reviewing the 13-mode results, the brake specific hydrocarbons (BSHC) for the Deutz F3L 912W was 0.454 g/hp-hr, BSCO was 1.627 g/hp-hr, and BSNO_x emissions were 4.445 g/hp-hr. The Perkins 4.203.2 engine produced a BSHC of 3.215 g/hp-hr. The 13-mode EPA heavy-duty diesel engine emission standard is 1.5 g/hp-hr BSHC, 25 g/hp-hr BSCO, and 10 g/hp-hr BSNO_x + BSHC. Other options involving trade-offs between BSHC and BSNO_x are also available. Comparison of the Deutz F3L 912W and Perkins 4.203.2 engine emissions to the EPA standard is not suggested since these engines were not necessarily designed to meet the heavy-duty diesel engine standard.

TABLE 9. GASEOUS AND SMOKE (GROUP 1) EMISSIONS FROM DEUTZ F3L 912W DIESEL ENGINE

Test No.	Speed, rpm	Load, %	Fuel Consumption, lb/hr	Smoke Opacity	Emission Rate, g/hp-hr			Emission Rate, g/hr			Raw Exhaust Concentration, ppm		
					HC	CO	NO _x	HC	CO	NO _x	HC	CO	NO _x
3-1	600	2	1.50	0.5	7.86	39.13	126.30	1	6	19	30	75	164
1	850	2	1.38	0.5	8.18	23.35	27.11	3	10	12	90	129	99
3-2	1100	2	1.98	1.0	5.14	14.79	29.50	2	8	16	60	87	114
3-3	1600	2	3.12	1.0	5.26	20.05	27.52	4	16	22	65	125	114
3-4	2650	2	6.00	1.0	19.75	86.05	46.36	13	57	31	160	356	129
2	850	7	1.68	0.5	3.96	8.10	11.32	5	10	14	130	134	124
1-1	1100	7	1.68	0.8	0.72	3.43	11.20	1	6	18	34	82	180
1-5	1600	7	3.30	1.0	1.59	5.86	13.10	4	14	31	58	108	160
1-9	2650	7	6.18	2.0	6.31	26.80	16.38	17	71	43	172	371	150
3	850	12.5	1.98	0.5	1.44	4.45	8.33	3	9	18	80	125	155
1-2	1100	12.5	1.98	0.8	0.48	2.11	8.28	1	6	23	37	82	215
1-6	1600	12.5	4.38	1.0	1.00	3.60	11.14	4	16	49	59	108	215
1-10	2650	12.5	6.78	1.5	2.62	12.37	9.51	14	66	50	142	342	175
2-1	600	25	1.80	0.5	0.24	1.56	9.04	1	4	23	24	79	293
4	850	25	2.70	0.5	0.43	1.83	5.65	2	8	25	48	104	208
2-2	1100	25	4.80	0.5	0.37	1.38	6.14	2	8	37	45	87	248
2-3	1600	25	6.00	1.0	0.39	1.59	7.88	3	13	66	45	95	293
2-4	2650	25	9.48	1.0	1.27	4.84	7.17	13	51	76	130	255	243
5	850	37.5	3.12	0.5	0.33	1.15	4.94	2	8	33	60	108	298
1-3	1100	37.5	3.78	0.8	0.20	0.61	4.69	2	5	40	42	65	330
1-7	1000	37.5	6.60	1.0	0.28	0.79	6.60	4	10	84	52	74	400
1-11	2650	37.5	11.92	2.1	0.87	3.43	6.02	14	54	96	117	239	270
3-5	1100	50	5.10	0.5	0.17	0.58	3.39	2	7	39	45	70	313
3-6	1600	50	7.80	0.5	0.20	0.42	4.56	3	7	79	50	54	387
3-7	2650	50	11.58	0.5	0.40	1.88	4.06	11	40	86	110	214	308
1-4	1100	75	7.20	0.8	0.13	0.33	4.25	2	6	72	48	65	545
1-8	1600	75	10.68	2.0	0.13	0.40	4.44	3	10	114	50	82	585
1-12	2650	75	15.00	2.5	0.36	1.08	4.49	11	34	140	113	177	470
3-8	1100	100	9.60	2.5	0.20	0.66	2.41	5	15	56	106	191	447
3-9	1600	100	13.80	2.0	0.14	0.55	2.33	5	19	79	72	151	402
3-10	2650	100	16.92	1.0	0.25	0.94	3.09	11	39	129	106	209	437

(1) Hydrocarbon concentrations reported in parts per million carbon (ppmC)

TABLE 10. GASEOUS AND SMOKE (GROUP I) EMISSIONS FROM PERKINS 4.203.2 ENGINE

Test No.	Speed, rpm	Load, %	Fuel Consumption, lb/hr	Smoke Opacity	Emission Rate, g/hp-hr			Emission Rate, g/hr			Raw Exhaust Concentration, ppm		
					HC	CO	NO _x	HC	CO	NO _x	HC(I)	CO	NO _x
3-1	500	2	0.72	0.5	106.28	80.52	61.90	13	10	8	720	274	146
1	750	2	1.02	0.5	61.89	65.38	28.65	23	25	11	824	437	128
3-2	1000	2	1.50	1.0	67.31	82.38	55.48	34	41	28	896	552	230
3-5	1500	2	3.00	0.5	68.76	118.45	55.43	52	89	42	720	624	195
3-8	2500	2	5.82	3.0	73.00	212.93	43.02	91	266	54	912	1348	167
2	750	7	1.62	0.5	33.34	29.10	15.98	38	33	18	1040	457	168
1-1	1000	7	1.92	1.0	13.71	20.97	18.38	24	37	32	560	431	261
1-5	1500	7	3.42	0.5	15.53	30.70	19.16	41	81	50	560	558	234
1-9	2500	7	6.00	0.5	17.23	55.14	16.55	65	207	62	648	1051	207
3	750	12.5	1.92	0.5	18.98	14.00	8.95	43	31	20	1200	447	195
1-2	1000	12.5	2.28	0.7	9.07	10.12	11.80	27	30	35	640	361	290
1-6	1500	12.5	4.32	1.0	8.12	13.96	12.36	46	70	70	616	536	313
1-10	2500	12.5	7.38	0.5	10.09	30.04	13.51	69	207	93	640	970	276
2-1	500	25	0.60	1.0	121.96	78.02	48.32	15	10	6	928	298	131
4	750	25	2.52	1.5	10.45	6.19	6.17	45	27	27	1280	386	258
2-2	1000	25	3.72	1.2	7.66	7.00	10.52	48	44	66	960	447	432
2-3	1500	25	5.58	0.5	7.19	7.24	10.42	70	71	102	960	494	447
2-4	2500	25	9.48	0.5	9.21	13.45	7.14	115	168	89	1104	828	273
5	705	37.5	3.12	1.5	5.98	3.35	5.43	39	22	36	1104	317	348
1-3	1000	37.5	4.38	1.0	2.99	2.35	6.61	29	23	64	664	269	507
1-7	1500	37.5	7.62	2.0	3.08	3.57	7.90	48	56	125	612	366	531
1-11	2500	37.5	10.98	0.5	3.45	6.98	7.08	67	135	137	604	630	402
3-3	1000	50	5.70	3.0	3.46	2.40	7.76	45	31	101	936	337	685
3-6	1500	50	8.40	1.0	2.69	2.56	7.44	52	50	145	728	361	675
3-9	2500	50	13.20	0.5	3.04	6.56	3.56	76	164	89	704	790	273
1-4	1000	75	7.98	1.5	1.47	0.88	6.23	28	17	118	608	195	904
1-8	1500	75	12.00	2.0	1.37	1.31	5.84	41	39	173	540	274	785
1-12	2500	75	18.00	0.5	1.68	2.65	3.38	65	103	131	592	494	402
3-4	1000	100	9.72	7.5	1.45	2.12	7.54	35	51	183	776	613	1380
3-7	1500	100	14.40	2.0	1.23	1.11	5.06	45	41	186	620	303	859
3-10	2500	100	20.52	1.5	1.04	3.28	3.16	48	152	146	464	790	482

(I) Hydrocarbon concentrations reported in parts per million carbon (ppmC)

TABLE 11. SUMMARY OF 13-MODE GASEOUS EMISSIONS
DATA, g/hp-hr

Mode	Engine Load, %	Engine Speed, rpm	Brake Specific Emission Rates, g/hp-hr					
			Deutz F3L 912W			Perkins 4.203.2		
			HC	CO	NO _x	HC	CO	NO _x
1	---	Idle	---	---	---	---	---	---
2	2	Peak-Torque	5.26	20.05	27.52	68.76	118.45	55.43
3	25	Peak-Torque	0.39	1.59	7.88	7.19	7.24	10.42
4	50	Peak-Torque	0.20	0.42	4.56	2.69	2.56	7.44
5	75	Peak-Torque	0.13	0.40	4.44	1.37	1.31	5.84
6	100	Peak-Torque	0.14	0.55	2.33	1.23	1.11	5.06
7	---	Idle	---	---	---	---	---	---
8	100	Rated	0.25	0.94	3.09	1.04	3.28	3.16
9	75	Rated	0.36	1.08	4.49	1.68	2.65	3.38
10	50	Rated	0.50	1.88	4.06	3.04	6.56	3.56
11	25	Rated	1.27	4.84	7.17	9.21	13.45	7.14
12	2	Rated	19.73	86.05	46.47	73.00	212.93	43.02
13	---	Idle	---	---	---	---	---	---

Cycle Composite Using 13-Mode Weight Factors

		Deutz F3L 912W	Perkins 4.203.2
BSHC	=	0.454	3.215
BSCO	=	1.627	5.438
BSNO _x	=	4.445	5.361

The 13-mode data presented represents engine operation under steady-state operation and may not reflect the emissions due to heavy repeated accel/decel modes of operation characteristic of typical forklift operation. Previous experience indicated that steady-state tests do not typically predict transient emission rates. This is confirmed by EPA developing a transient cycle for heavy-duty engine certification to replace the 13-mode.

2. Emission Trends

The variety of engine speed and load combinations provided an opportunity to determine the effect of engine load on brake specific emission rates at peak torque and rated speeds for both engines. The effects of engine load on BSHC, BSCO, and BSNO_x emission rates at 1600 rpm (peak torque) and 2650 rpm (rated) for the Deutz

F3L 912W are illustrated in Figure 6. BSHC emissions were less than 0.4 g/hp-hr at 25 percent or greater load at 1600 rpm, but increased dramatically to 5.3 g/hp-hr at 2 percent load. The BSHC emission rates at 2650 rpm were somewhat higher (1.27 g/hp at 25 percent load), increasing to 20 g/hp-hr at 2 percent load. Mass emission rates for hydrocarbons ranged from 11-17 g/hr over the entire range of loads at 2650 rpm. The HC g/hr emission rate at 1600 rpm varied from 3-5 g/hr over the range of loads. At 2650 rpm, HC raw exhaust concentrations ranged from 106 ppmC to 172 ppmC, while HC exhaust concentrations ranged from 45-72 ppmC at 1600 rpm.

The effect of engine load on BSCO emissions is shown in Figure 6. The BSCO emissions at 2650 rpm were less than 5 g/hp-hr at 25 percent or greater load, but increased significantly to 86 g/hp-hr at 2 percent load. BSCO emissions at 1600 rpm for the Deutz F3L 912W followed similar trends, i.e., the BSCO at 25 percent or greater load was less than 2 g/hp-hr but increased to 20 g/hp-hr at 2 percent load. Mass CO emission rates ranged from 34-71 g/hr at 2650 rpm as compared to 7-19 g/hr at 1600 rpm. The CO concentrations for the Deutz F3L 912W ranged from 177-371 ppm at 2650 rpm. At 1600 rpm, the CO concentrations varied from 54-151 ppm.

Figure 6 also illustrates the effect of engine load on BSNO_x emission rates from the Deutz F3L 912W. The general emission trends observed with CO and HC were also observed with NO_x, i.e., relatively low BSNO_x at 25 percent or greater load (7 g/hp-hr), escalating to 46 g/hp-hr at 2 percent load at 2650 rpm. At 1600 rpm, this increase was not quite so dramatic where the BSNO_x went from 8 g/hp-hr at 25 percent or greater loads to 28 g/hp-hr at 2 percent load. Mass NO_x emission rates ranged from 31-140 g/hr at 2650 rpm to 22-114 g/hr at 1600 rpm. NO_x concentrations ranged from 129-470 ppm NO_x at 2650 ppm as compared to 114-585 ppm NO_x at 1600 rpm.

A summary of the range of emissions reported for the Deutz F3L 912W over the entire test matrix is presented in Table 12. This table includes the three primary methods of expressing emissions, g/hp-hr, g/hr, and ppm. Smoke opacity ranges are also included for reference.

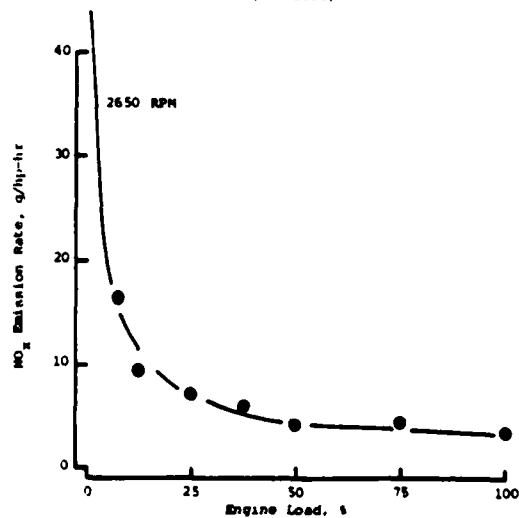
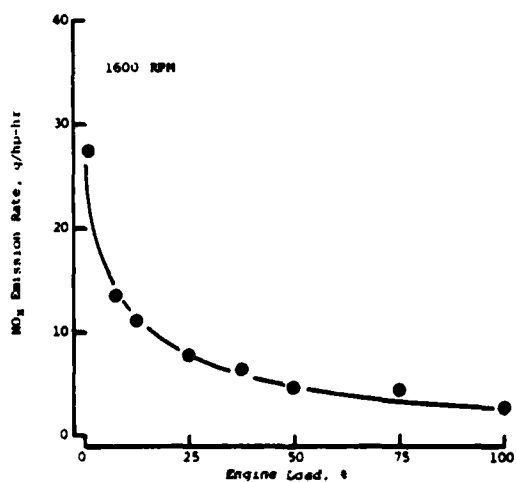
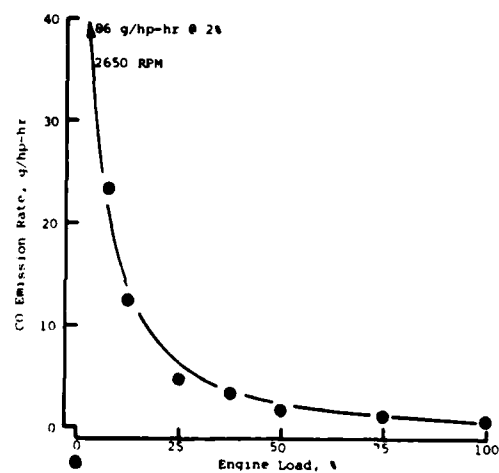
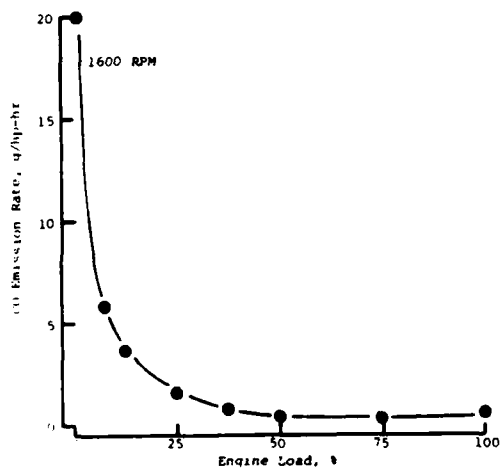
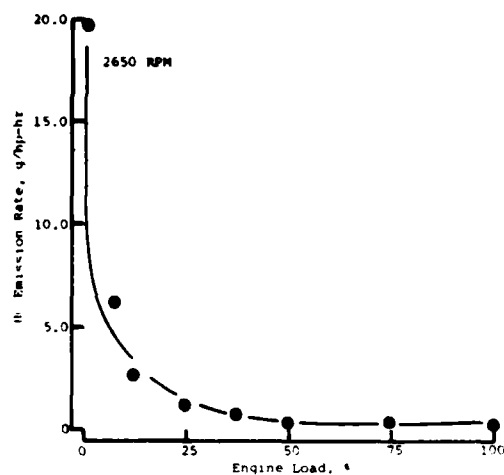
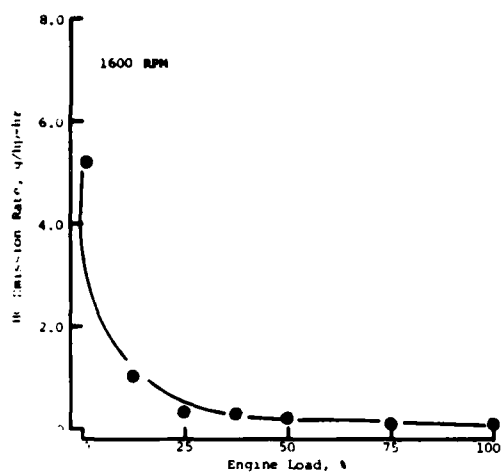


FIGURE 6. THE EFFECT OF ENGINE LOAD ON HYDROCARBONS, CARBON MONOXIDE AND OXIDES ON NITROGEN EMISSION RATES FROM A DEUTZ F3L 912W AT TWO ENGINE SPEEDS

TABLE 12. SUMMARY OF EMISSION RATES AND CONCENTRATION MINIMUM AND MAXIMUM VALUES FOR THE DEUTZ F3L 912W AND PERKINS 4.203.2 OVER COMPLETE TEST MATRIX

Exhaust Species	Emission Rate/Conc.	Deutz F3L 912W		Perkins 4.203.2	
		Minimum	Maximum	Minimum	Maximum
HC	g/hp-hr	0.13	19.75	1.04	122
	g/hr	2	17	13	115
	ppmC	24	172	464	1280
CO	g/hp-hr	0.33	86.05	0.88	213
	g/hr	4	71	10	266
	ppm	54	371	195	1348
NO _x	g/hp-hr	2.33	126.30	3.16	61.90
	g/hr	12	140	6	186
	ppm	99	585	128	1380
Smoke	opacity	0.5	2.5	0.5	7.5

The effect of engine load on BSHC, BSCO, and BSNO_x emissions for the Perkins 4.203.2 is illustrated in Figure 7. The BSHC emissions increased from 7-8 g/hp-hr at 25 percent load to 69 and 73 g/hp-hr at 1500 rpm and 2500 rpm, respectively. Mass HC emissions ranged from 48-115 g/hr at 3500 rpm and from 41-70 g/hr at 1500 rpm. Observed HC concentrations varied from 464-1104 ppm at 2500 rpm to 540-960 ppm at 1500 rpm.

Figure 7 also illustrates the effect of engine load on BSCO emission rates from the Perkins 4.203.2 engine. The BSCO emission rate was less than 14 g/hr at 25 percent or greater load but increased substantially to 213 g/hp-hr at 2 percent load at 2500 rpm. At 1500 rpm, the BSCO emissions were less than 8 g/hp-hr at 25 percent and greater engine loads and increased to 118 g/hp-hr at 2 percent load. The CO mass emission rates ranged from 103-266 g/hr at 2500 rpm as compared to 39-89 g/hr at 1500 rpm. Raw CO exhaust concentrations varied from 494-1348 ppm at 2500 rpm and 274-624 ppm at 1500 rpm.

BSNO_x emission trends from the Perkins 4.203.2 are also presented in Figure 7. At 2500 BSNO_x, emission rates were less than 7 g/hp-hr at 25 percent or greater loads and increased to 43 g/hp-hr at 2 percent load. The NO_x mass emission rates ranged

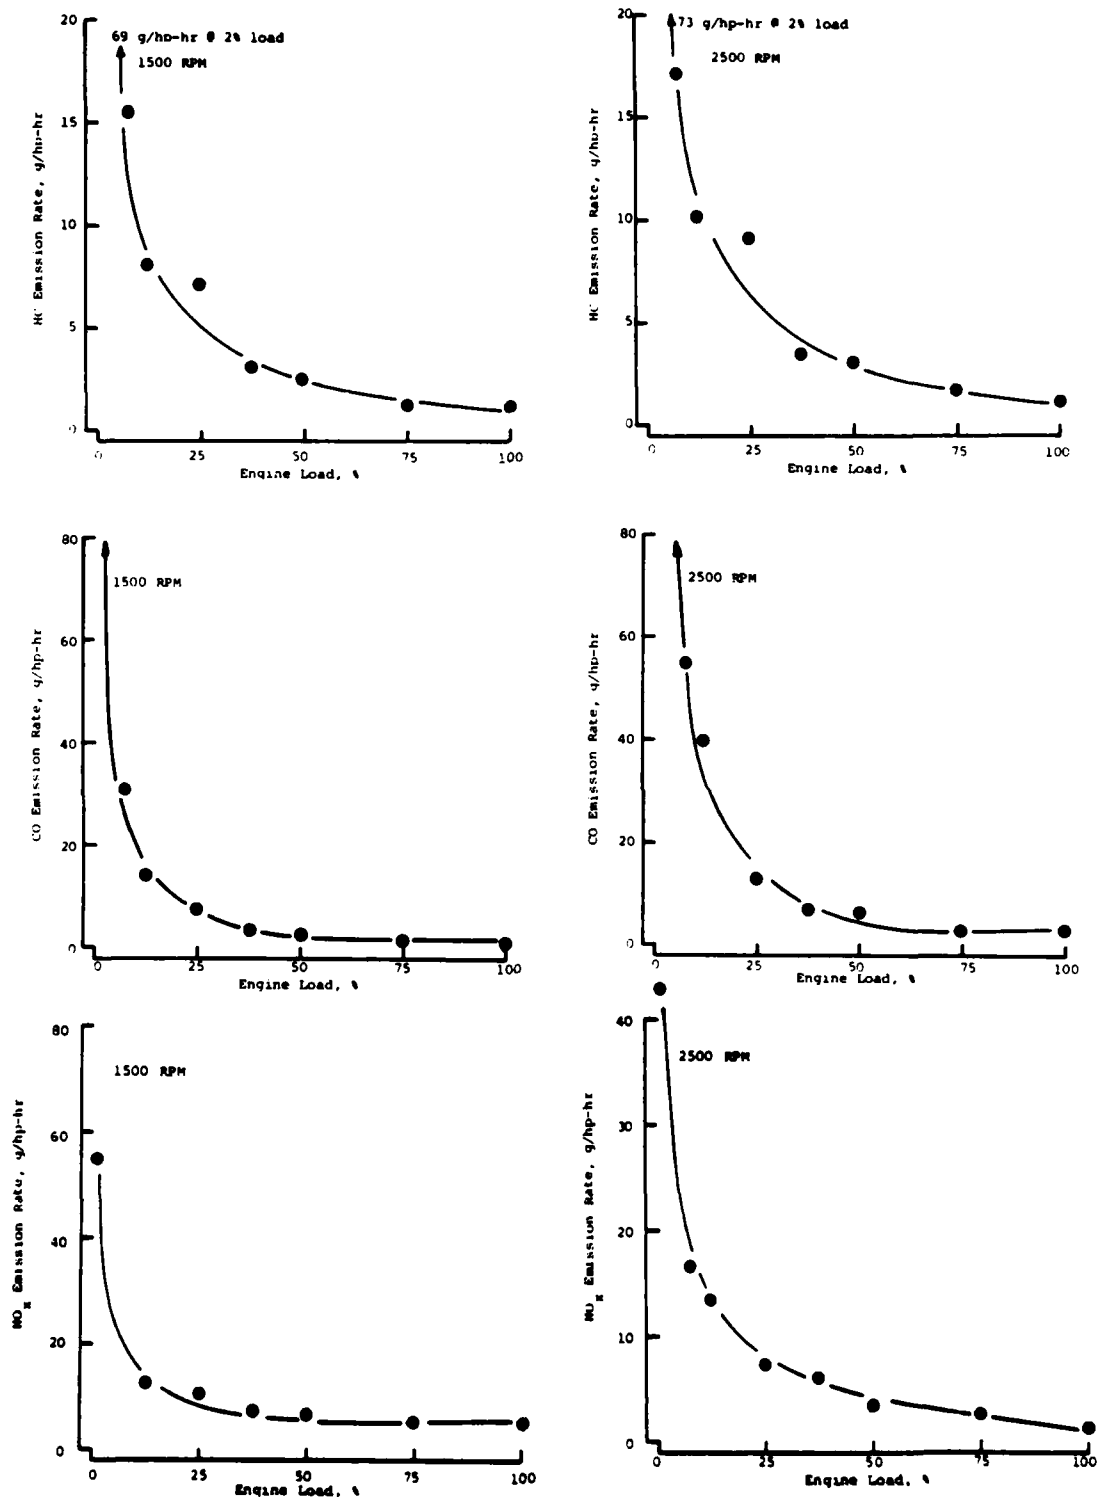


FIGURE 7. THE EFFECT OF ENGINE LOAD ON HYDROCARBONS, CARBON MONOXIDE AND OXIDES OF NITROGEN EMISSION RATES FROM A PERKINS 4.203.2 AT TWO ENGINE SPEEDS

from 54-146 g/hr at 2500 rpm and 42-186 g/hr at 1500 rpm. Raw NO_x exhaust concentrations for the Perkins 4.203.2 ranged from 167-482 ppm NO_x at 2500 rpm and from 195-859 ppm NO_x at 1500 rpm. Table 12 summarizes the minimum and maximum emission rates (g/hp-hr and g/hr), ppm concentrations, and smoke opacity for the Perkins 4.203.2 engine for all modes tested.

B. Group II Emissions

Specific analyses included in the Group II analyses were particulates, sulfur dioxide, and sulfate. These emissions were collected at four engine speeds (idle, intermediate, peak torque, and rated) at 2- and 25-percent load and three engine speeds (intermediate, peak torque, and rated) at 50- and 100-percent load. Emission rates and concentrations from tests with the Deutz F3L 912W engine are presented in Table 13, while results from the Perkins 4.203.2 engine are found in Table 14.

1. Particulate

The effect of engine load on particulate emission rates is presented in Figure 8 for the Deutz F3L 912W engine for intermediate, peak torque, and rated engine speeds. Figure 9 illustrates the effect of engine load on particulate emission rates from the Perkins 4.203.2 engine. In reviewing these data, several trends were observed, namely:

- o At constant speed, particulate mass emission rates increased with increasing load. The rate of particulate mass rate increase was more pronounced at the intermediate and peak torque speeds.
- o The 2-percent load condition produced significantly higher brake specific particulate emission rates (g/hp-hr) than the higher loads.
- o The Perkins 4.203.2 brake specific particulate emission rates ranged from 0.55 g/hp-hr to 1.81 g/hp-hr under loaded conditions 25-100 percent load at the intermediate, peak torque, and rated speeds. At

TABLE 13. PARTICULATE, SULFUR DIOXIDE, AND SULFATE (GROUP II)
EMISSIONS FROM A DEUTZ F3L 912W DIESEL ENGINE

Test No.	Speed, rpm	Load, %	Emission Rate, g/hr			Emission Rate, g/hp-hr			Concentration		
			Particu- late	SO ₂	Sulfate	Particu- late	SO ₂	Sulfate	Particu- late, mg/m ³	SO ₂ , ppm	Sulfate, mg/m ³
3-1	600	2	1.57	2.30	0.278	9.81	11.50	1.390	32	17.24	5.7
3-2	1100	2	2.12	5.08	0.177	5.17	8.47	0.295	26	23.11	2.2
3-3	1600	2	6.97	8.59	0.318	9.68	10.74	0.398	58	26.43	2.7
3-4	2650	2	9.70	16.48	0.404	11.28	23.54	0.577	43	26.75	1.8
2-1	600	25	1.56	5.18	0.061	0.61	1.99	0.024	33	40.11	1.7
2-2	1100	25	2.69	12.94	0.252	0.45	2.12	0.041	33	58.57	3.1
2-3	1600	25	5.05	15.93	0.452	0.59	1.90	0.054	42	48.65	3.8
2-4	2650	25	10.90	28.79	1.021	1.03	2.72	0.096	60	58.47	5.7
3-5	1100	50	3.73	14.92	0.270	0.32	1.29	0.023	48	69.75	3.4
3-6	1600	50	4.06	23.27	0.501	0.24	1.35	0.029	35	73.15	4.3
3-7	2650	50	9.33	23.04	0.784	0.44	1.09	0.037	53	47.93	4.4
3-8	1100	100	16.51	32.19	0.401	0.71	1.39	0.017	215	153.81	5.2
3-9	1600	100	12.97	36.14	0.693	0.38	1.06	0.020	110	112.46	5.9
3-10	2600	100	11.81	51.61	1.021	0.28	1.24	0.024	66	105.57	5.7

TABLE 14. PARTICULATE, SULFUR DIOXIDE, AND SULFATE (GROUP II)
EMISSIONS FROM A PERKINS 4.203.2 DIESEL ENGINE

Test No.	Speed, rpm	Load, %	Emission Rate, g/hr			Emission Rate, g/hp-hr			Concentration, ppm		
			Particu- late	SO ₂	Sulfate	Particu- late	SO ₂	Sulfate	Particu- late, mg/m ³	SO ₂ , ppm	Sulfate, mg/m
3-1	500	2	1.24	0.73	0.115	12.40	7.30	1.150	33	7.04	3.0
3-2	1000	2	5.99	4.20	0.256	11.98	8.40	0.512	72	10.11	3.1
3-5	1500	2	5.24	8.79	0.241	6.55	10.99	0.301	40	24.92	1.9
3-8	2500	2	21.28	15.21	0.709	16.37	11.70	0.545	114	29.96	3.8
2-1	500	25	1.69	1.09	0.132	16.90	10.90	1.320	44	10.41	3.4
2-2	1000	25	6.94	6.45	0.247	1.10	1.02	0.039	87	29.67	3.1
2-3	1500	25	9.84	16.88	0.455	1.00	1.72	0.046	76	47.67	3.5
2-4	2500	25	22.64	17.98	0.760	1.81	1.44	0.061	121	35.24	4.1
3-3	1000	50	8.61	13.35	0.324	0.66	1.03	0.025	106	60.14	4.0
3-6	1500	50	10.85	24.90	0.639	0.55	1.28	0.033	83	70.22	4.9
3-9	2500	50	16.70	39.02	0.888	0.67	1.56	0.036	89	76.65	4.8
3-4	1000	100	22.21	34.11	0.418	0.91	1.40	0.017	282	158.67	5.3
3-7	1500	100	22.26	41.94	0.678	0.60	1.14	0.018	170	117.67	5.2
3-10	2500	100	31.56	40.12	1.422	0.68	0.87	0.031	166	77.47	7.5

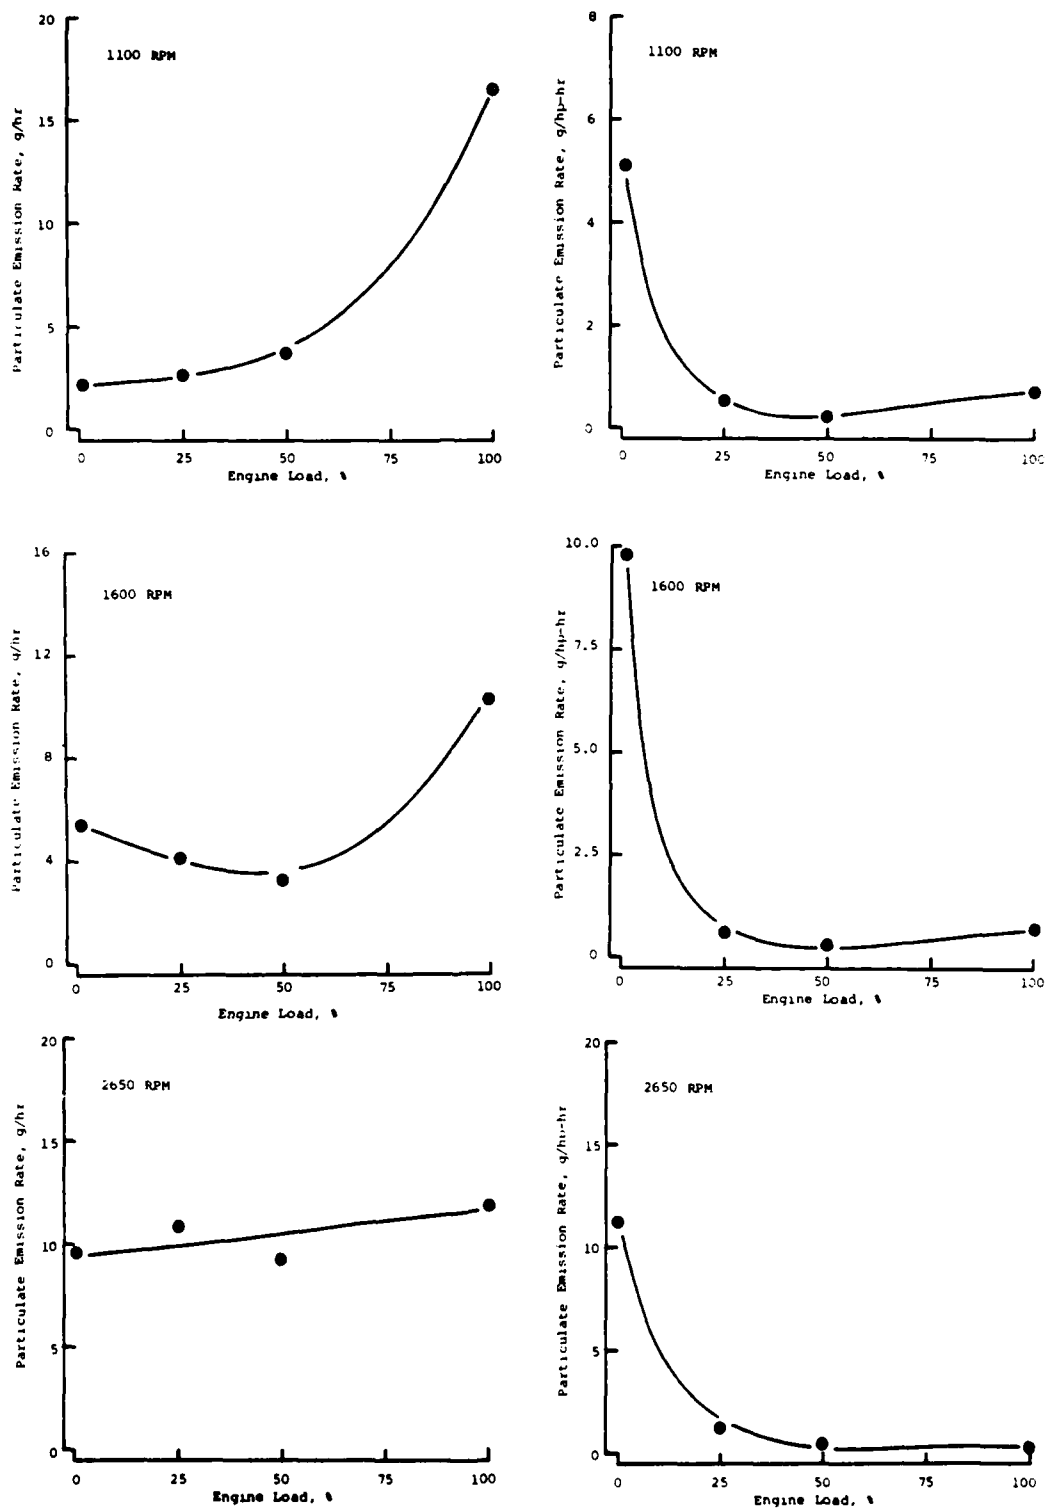


FIGURE 8. EFFECT OF ENGINE LOAD ON PARTICULATE EMISSION RATES FROM A DEUTZ F3L 912W AT THREE ENGINE SPEEDS

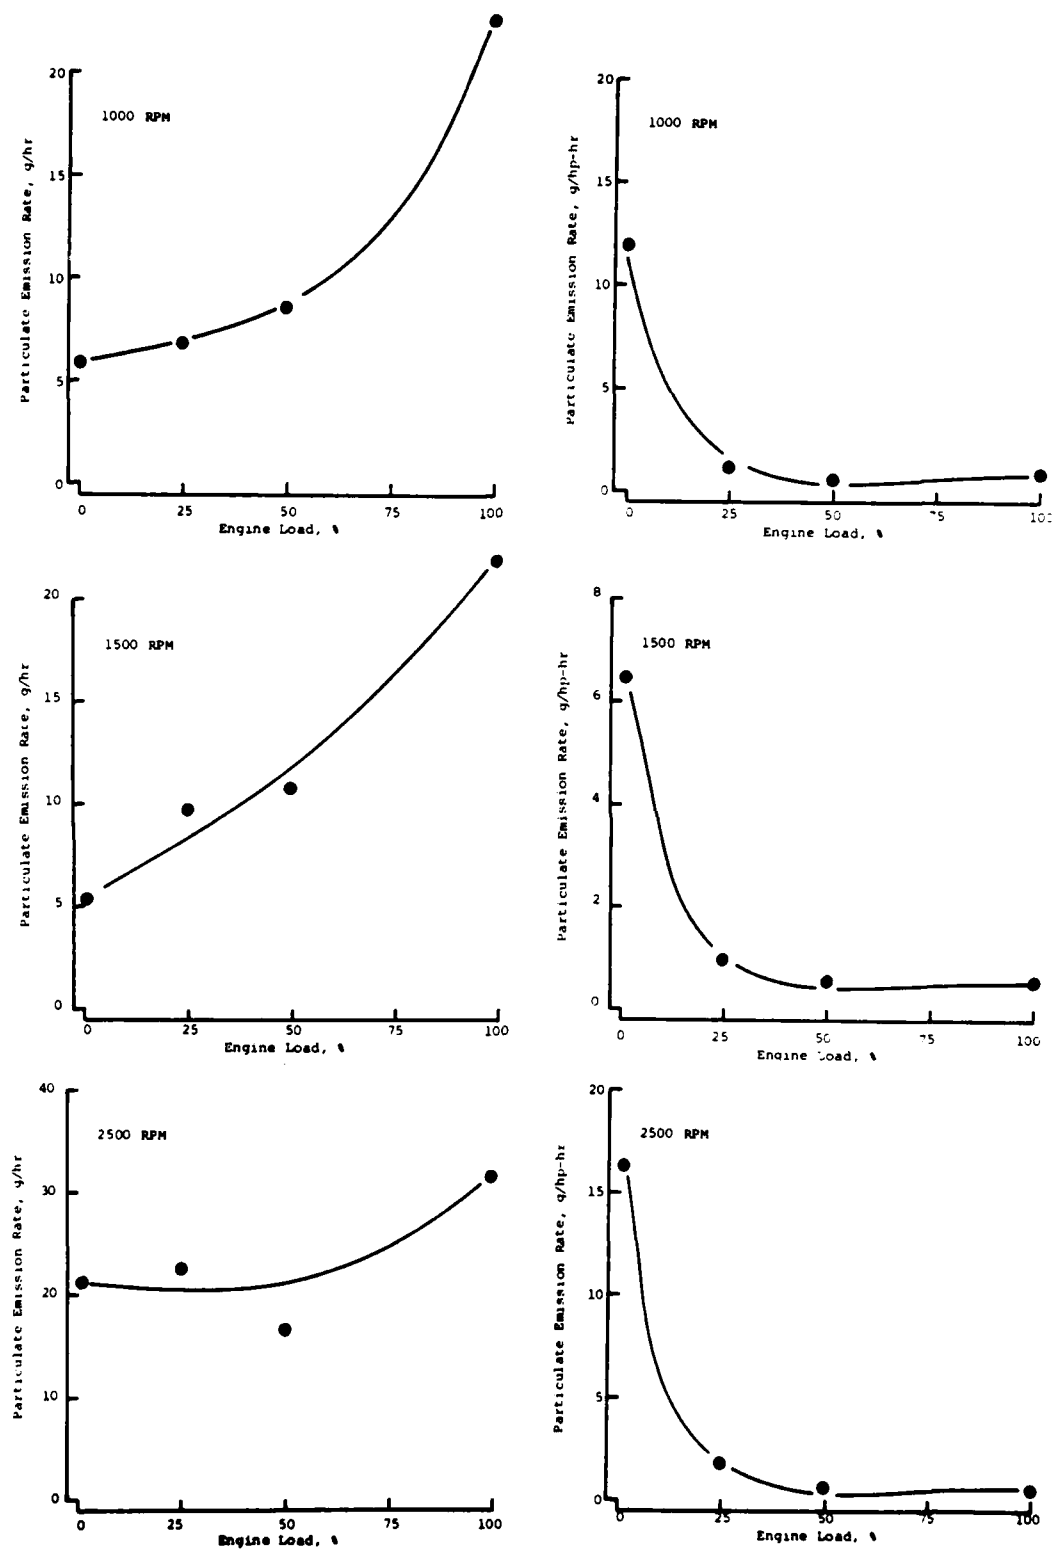


FIGURE 9. EFFECT OF ENGINE LOAD ON PARTICULATE EMISSION RATES FROM A PERKINS 4.203.2 AT THREE ENGINE SPEEDS

2-percent load, the brake specific particulate emission rate ranged from 6.55-16.37 g/hp-hr.

- o The Deutz F3L 912W brake specific particulate emission rates ranged from 0.24-1.03 g/hp-hr for the loaded conditions (25-100 percent load) at the three engine speeds, i.e., intermediate, peak torque, and rated. At the 2-percent load, the brake specific particulate emission rates ranged from 5.17-11.28 g/hp-hr.

2. Sulfur Dioxide

Sulfur dioxide emission rates and concentrations from the Deutz F3L 912W and the Perkins 4.203.2 engines are presented in Tables 13 and 14, respectively. The mass and brake specific sulfur dioxide emission rates are presented as a function of engine load at several engine speeds in Figures 10 and 11 for the Deutz F3L 912W and the Perkins 4.203.2 respectively. Several trends are apparent from these results, namely:

- At constant speed, sulfur dioxide mass emission rates increase with an increase in load at all three speeds (intermediate, peak torque, and rated), probably as a result of more fuel (and sulfur) being burned.
- Significantly higher brake specific sulfur dioxide emission rates were observed at the 2-percent load at the intermediate, peak torque, and rated speeds, than at 25-100 percent loads.
- Brake specific sulfur dioxide emission rates ranged from 0.87-1.72 g/hp-hr at the 25-100 percent loads for intermediate, peak torque, and rated engine speeds for the Perkins 4.203.2.
- Brake specific sulfur dioxide emission rates ranged from 1.09-2.72 g/hp-hr at the 25-100 percent loads at intermediate, peak torque, and rated engine speeds for the Deutz F3L 912W.

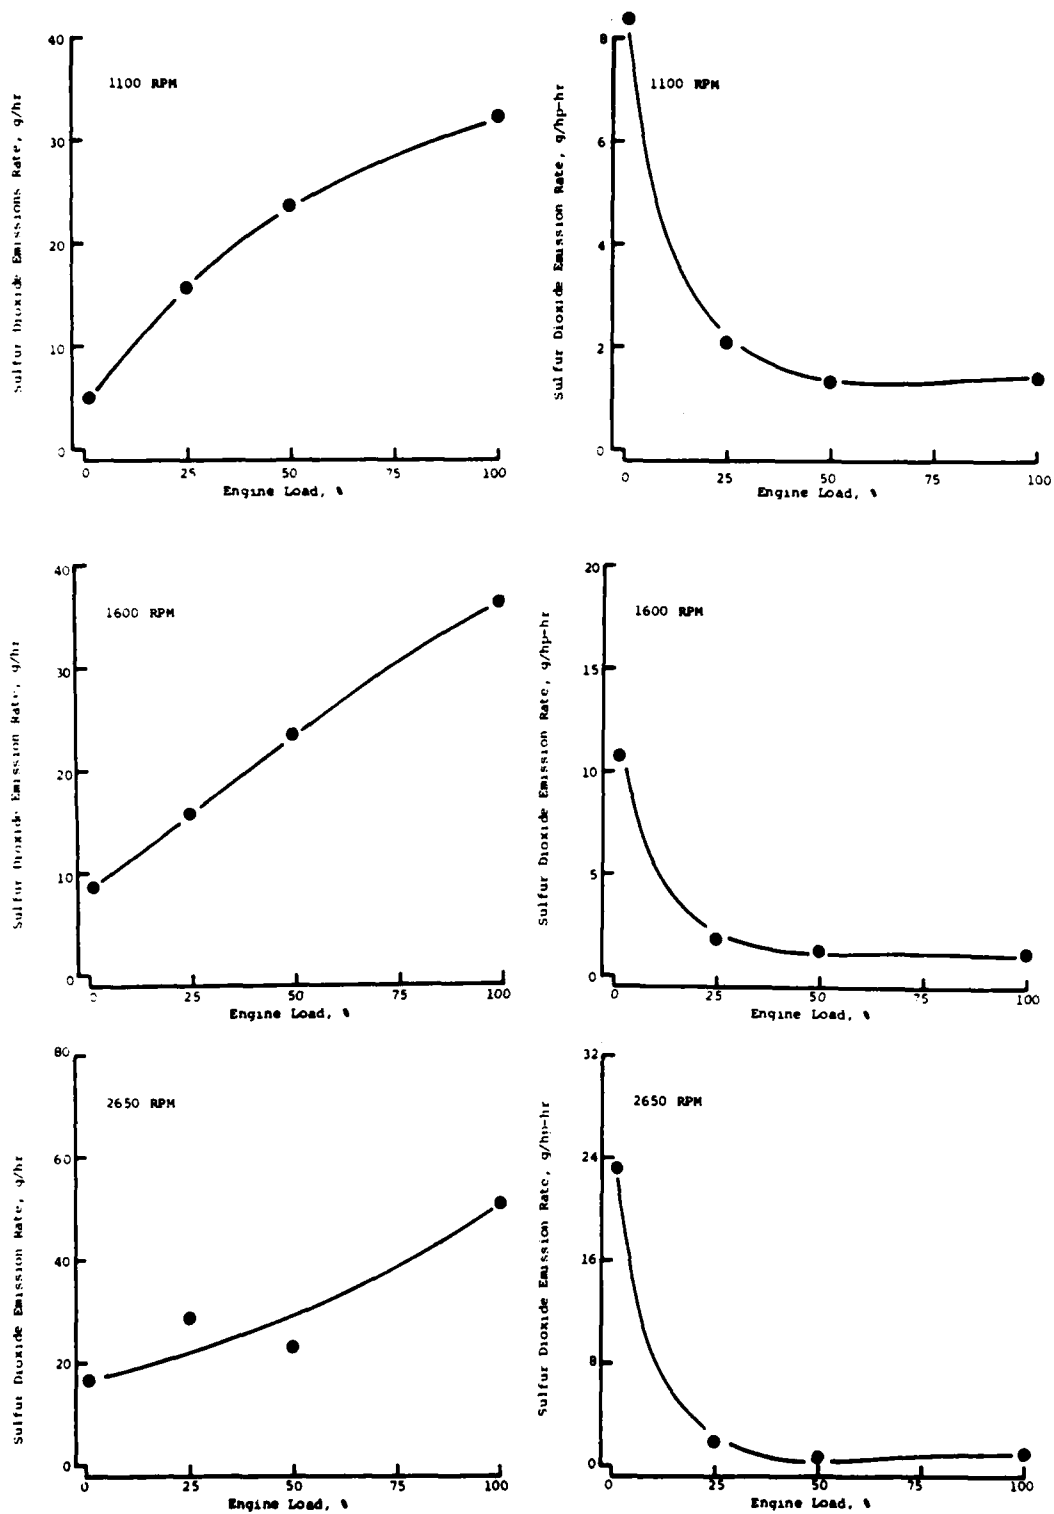


FIGURE 10. EFFECT OF ENGINE LOAD ON SULFUR DIOXIDE EMISSION RATES FROM A DEUTZ F3L 912W AT THREE ENGINE SPEEDS

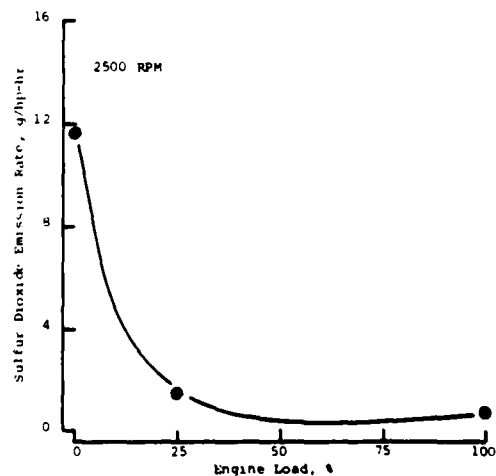
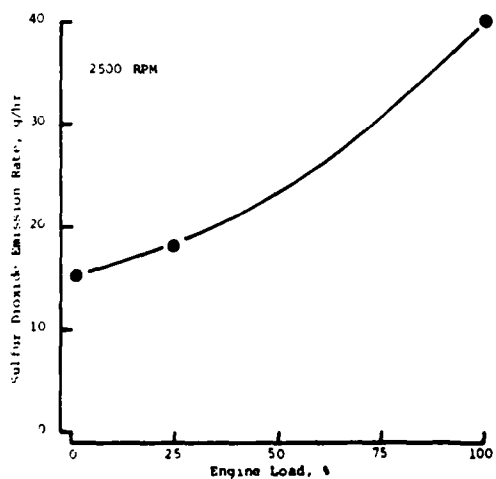
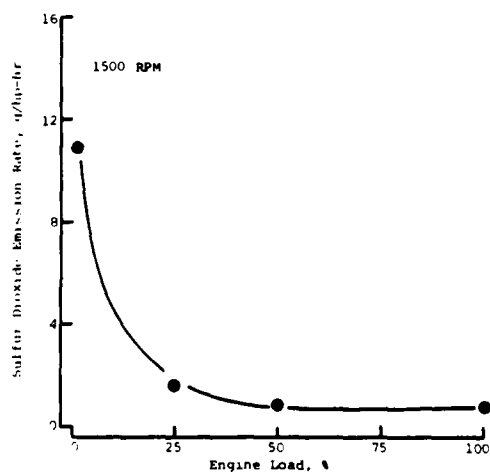
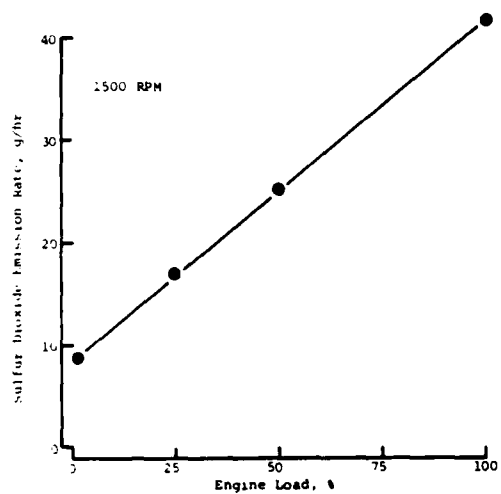
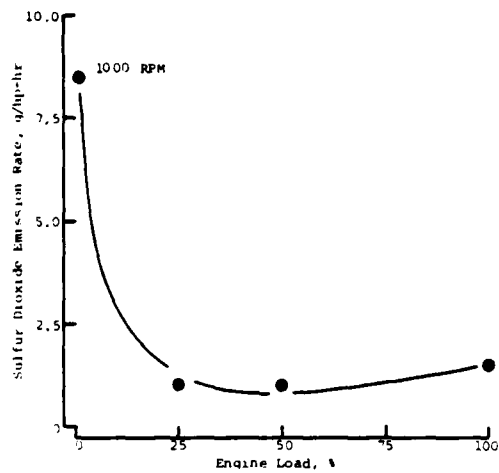
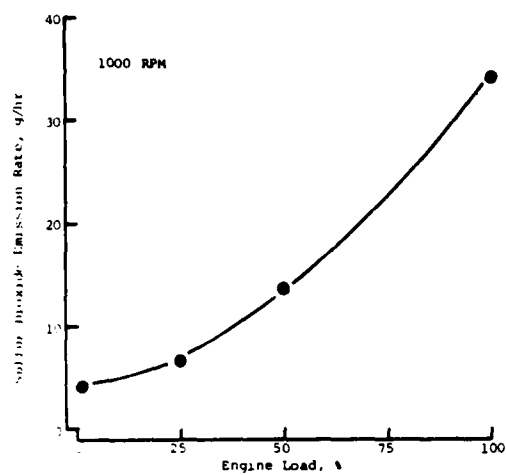


FIGURE 11. EFFECT OF ENGINE LOAD ON SULFUR DIOXIDE EMISSION RATES FROM A PERKINS 4.203.2 AT THREE ENGINE SPEEDS

3. Sulfate

Sulfate emission rates were obtained at various engine speeds and loads for both engines. Sulfate emission rates for the Deutz F3L 912W and the Perkins 4.203.2 are presented in Tables 13 and 14, respectively. The effect of engine load on sulfate emission rates at three engine speeds is illustrated in Figures 12 and 13 for the Deutz F3L 912W and the Perkins 4.203.2 engines. The sulfate emission trends from both engines were quite similar and are summarized below:

- Sulfate brake specific emission rates (g/hp-hr) were significantly higher at engine loads of 25 percent or less.
- Sulfate mass emission rates (g/hr) increased as the engine load (and fuel consumption) increased at all three speeds for both engines.
- In general, less than 5 percent of the fuel sulfur was converted to sulfate.

C. Group III Emissions

Exhaust emissions included in the Group III analyses include aldehydes and ketones, organic sulfides, phenols, and DOAS odor. This section presents the results of these analyses for both engines. The Group III analyses were performed at 2-percent load (idle, intermediate, peak torque, and rated engine speed), 50- and 100-percent load (intermediate, peak torque, and rated engine speeds).

1. Aldehyde and Ketone Analysis

The aldehyde and ketone emission rates, expressed in mg/hp-hr, are presented in Table 15 for the Deutz F3L 912W engine. Observed concentrations for each aldehyde and ketone for these same tests are presented in Table 16, and absolute emission rates expressed in mg/hr are found in Table 17. The aldehyde and ketone emission rates from the Perkins 4.203.2 are found in Tables 18 (mg/hp-hr), 19 (mg/hr), and 20 (ppm). Summaries of the total aldehyde and ketone emission rates from both engines are presented in Table 21. In general, these results are summarized below:

- Formaldehyde was the predominate aldehyde detected, generally accounting for 30-50 percent of the total detected.
- Formaldehyde concentrations were less than 0.5 ppm for all test conditions for the Deutz F3L 912W engine and less than 3.2 ppm for all test conditions with the Perkins 4.203.2 engine.
- Brake specific aldehyde emission rates increased with a decrease in load at constant speed for the Deutz F3L 912W engine.
- Aldehyde and ketone emission rates for the Perkins 4.203.2 engine were higher than the Deutz F3L 912W engine on all modes tested.

2. Organic Sulfides

Organic sulfides were collected on Tenax-GC traps for analysis by gas chromatography using a flame photometric detector. Samples were collected on the same ten modes as for other Group III analyses on both engines. No organic sulfides were detected in exhaust of the Deutz F3L 912W engine for any of the ten modes sampled. Organic sulfide emission rates from the Perkins 4.203.2 engine are presented in Table 22, and minimum organic sulfide detection limits are shown in Table 8. Based on the limited data available, the following generalizations are made:

- Carbonyl sulfide was the predominate organic sulfide measured on the Perkins 4.203.2 engine; no organic sulfides were detected with the Deutz F3L 912W engine.
- At constant load, carbonyl sulfide mass emission rates increased with an increase in engine speed with the Perkins 4.203.2 engine.
- With the Perkins 4.203.2 engine at constant speed, the carbonyl sulfide mass emission rates decreased with an increase in load.

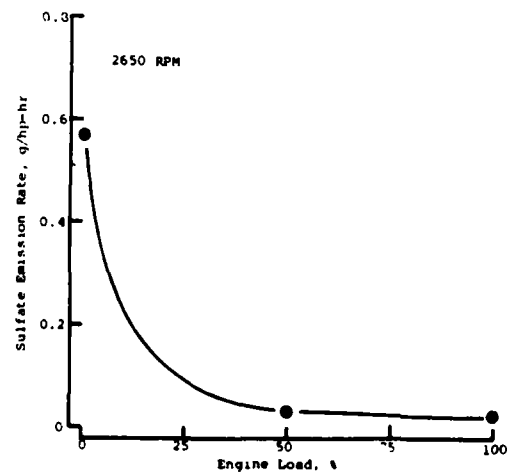
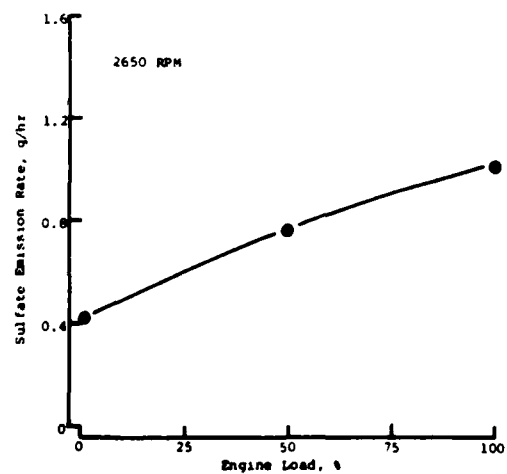
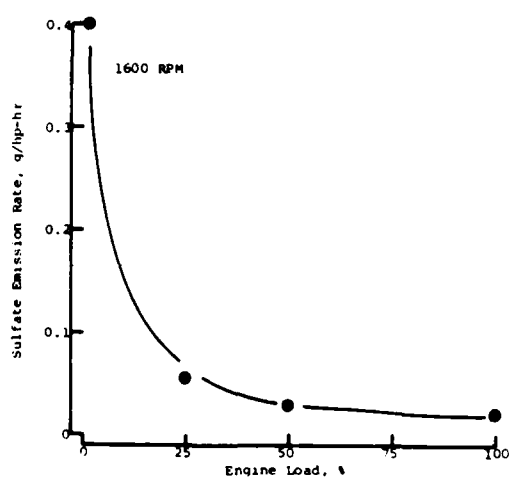
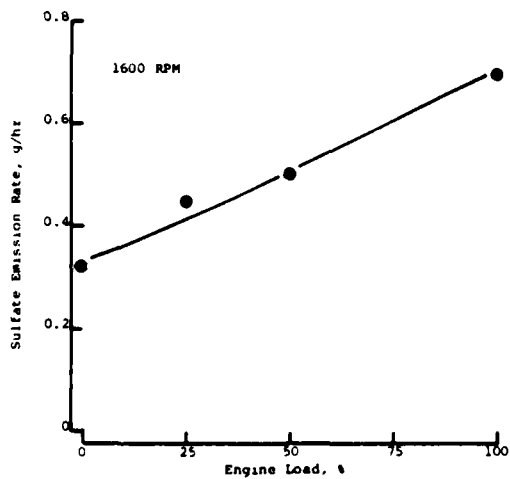
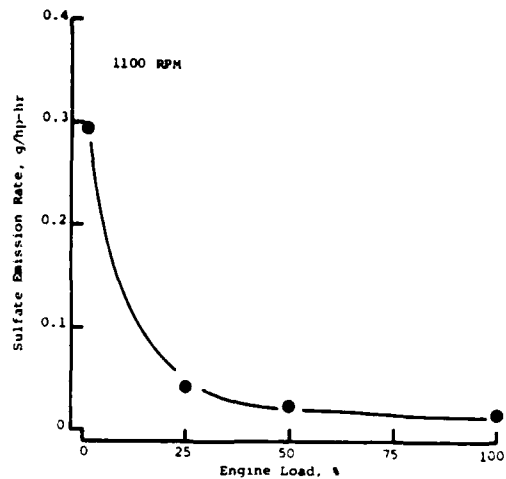
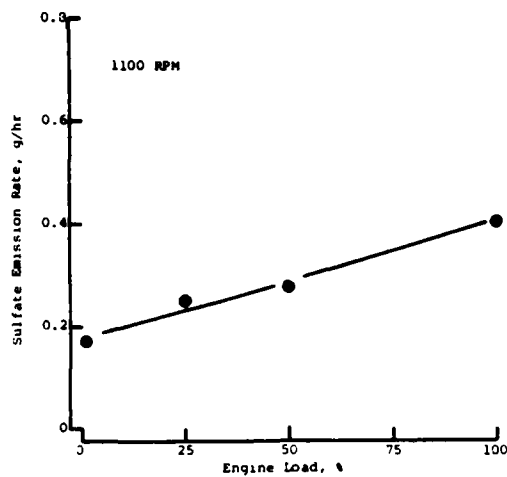


FIGURE 12. EFFECT OF ENGINE LOAD ON SULFATE EMISSION RATES FROM A DEUTZ F3L 912W AT THREE ENGINE SPEEDS

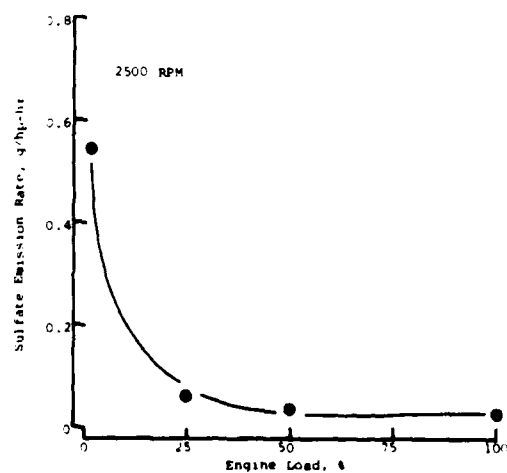
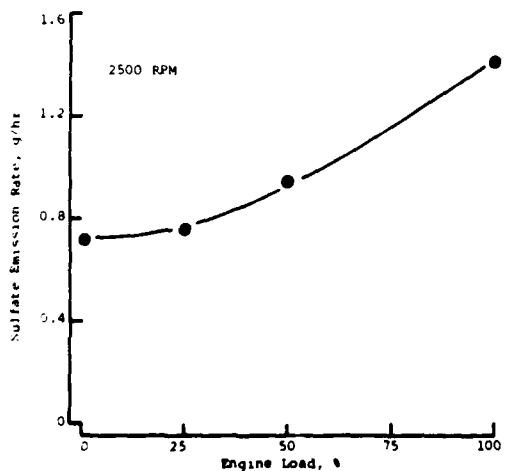
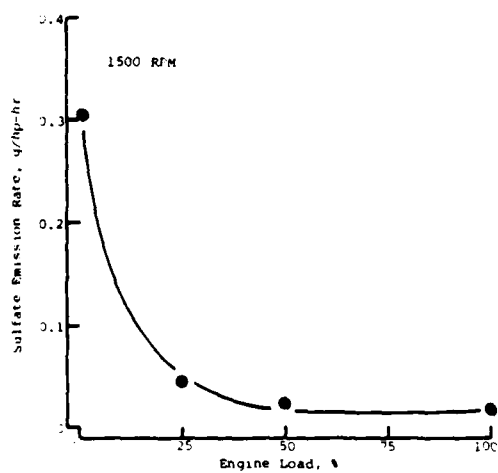
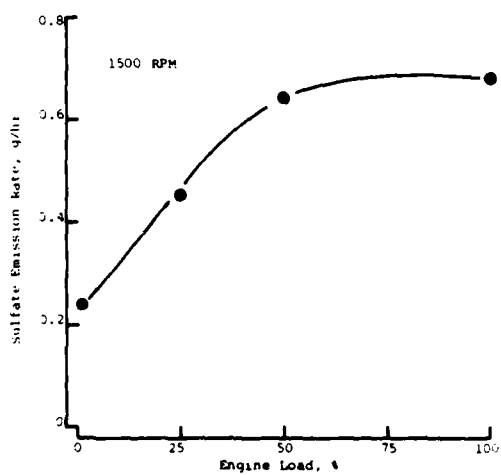
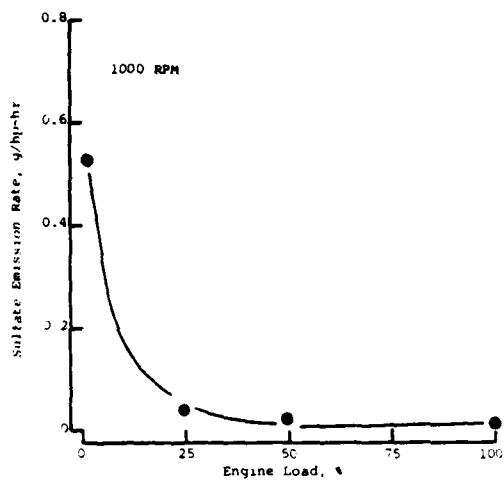
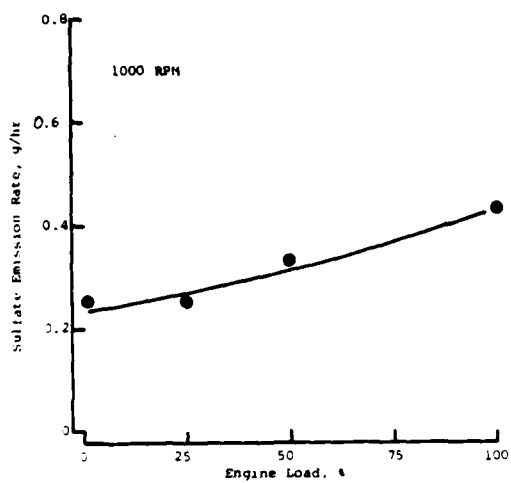


FIGURE 13. EFFECT OF ENGINE LOAD ON SULFATE EMISSION RATES FROM A PERKINS 4.203.2 AT THREE ENGINE SPEEDS

TABLE 15. ALDEHYDE EMISSION RATES FROM A
DEUTZ F3L 912W DIESEL ENGINE (MG/HP-HR)

Test No.	Engine Speed, rpm	Load, %	Aldehyde Emission Rate, mg/hp-hr									
			Formaldehyde	Acetaldehyde	Acrolein	Propionaldehyde	Acetone	Crotonaldehyde	Isobutyraldehyde	MEK	Benzaldehyde	Hexanaldehyde
3-1	600	2	25	ND	10	ND	ND	ND	5	175	ND	ND
3-2	1100	2	12	3	ND	3	ND	7	7	23	5	ND
3-3	1600	2	18	3	4	4	ND	9	5	26	15	ND
3-4	2650	2	133	40	71	37	ND	47	39	333	87	ND
3-5	1100	50	1.3	ND	0.3	ND	ND	0.4	0.3	1.1	ND	ND
3-6	1600	50	1.9	ND	0.8	ND	0.5	0.3	0.2	1.2	ND	0.3
3-7	2650	50	3.9	0.2	1.0	ND	1.0	0.8	ND	1.3	0.3	ND
3-8	1100	100	0.3	ND	ND	0.1	ND	0.3	0.1	0.6	0.3	ND
3-9	1600	100	0.6	ND	ND	0.1	ND	0.6	ND	0.6	0.2	ND
3-10	2650	100	0.4	ND	0.1	0.1	ND	0.1	ND	0.6	0.3	ND

TABLE 16. ALDEHYDE EMISSION CONCENTRATIONS FROM A
DEUTZ F3L 912W DIESEL ENGINE (PPM)

Test No.	Engine Speed, rpm	Load, %	Aldehyde and Ketone Raw Exhaust Concentration, ppm									
			Formaldehyde	Acetaldehyde	Acrolein	Propionaldehyde	Acetone	Crotonaldehyde	Isobutyraldehyde	MEK	Benzaldehyde	Hexanaldehyde
3-1	600	2	0.09	ND	0.02	ND	ND	ND	0.01	0.24	ND	ND
3-2	1100	2	0.07	0.01	ND	0.01	ND	0.02	0.02	0.06	0.01	ND
3-3	1100	2	0.10	0.01	0.01	0.01	ND	0.02	0.01	0.06	0.02	ND
3-4	2650	2	0.33	0.07	0.10	0.05	ND	0.05	0.04	0.34	0.06	ND
3-5	1100	50	0.06	ND	0.02	ND	ND	0.02	0.02	0.06	ND	ND
3-6	1600	50	0.22	ND	0.05	ND	0.03	0.02	0.01	0.06	ND	0.01
3-7	2650	50	0.38	0.01	0.05	ND	0.05	0.03	ND	0.05	0.01	ND
3-8	1100	100	0.09	ND	ND	0.01	ND	0.02	0.01	0.06	0.02	ND
3-9	1600	100	0.14	ND	ND	0.01	ND	0.02	ND	0.06	0.01	ND
3-10	2650	100	0.07	ND	0.01	0.01	ND	0.01	ND	0.05	0.02	ND

TABLE 17. ALDEHYDE AND KETONE EMISSION RATES FROM A
DEUTZ F3L 912W DIESEL ENGINE (MG/HR)

Test No.	Engine Speed, rpm	Load, %	Aldehyde and Ketone Emission Rate, mg/hr									
			Formaldehyde	Acetaldehyde	Acrolein	Propionaldehyde	Acetone	Crotonaldehyde	Isobutyraldehyde	MEK	Benzaldehyde	Hexanaldehyde
3-1	600	2	5	ND	2	ND	ND	ND	1	35	ND	ND
3-2	1100	2	7	2	ND	2	ND	4	4	14	3	ND
3-3	1600	2	14	2	3	3	ND	7	4	21	12	ND
3-4	2650	2	93	28	50	26	ND	33	27	233	61	ND
3-5	1100	50	15	ND	4	ND	ND	5	4	13	ND	ND
3-6	1600	50	32	ND	13	ND	9	5	4	21	ND	5
3-7	2650	50	83	4	22	ND	21	16	ND	27	7	ND
3-8	1100	100	8	ND	ND	2	ND	7	2	13	6	ND
3-9	1600	100	20	ND	ND	3	ND	21	ND	19	7	ND
3-10	2650	100	17	ND	4	4	ND	5	ND	25	14	ND

TABLE 18. ALDEHYDE EMISSION RATES FROM A
PERKINS 4.203.2 DIESEL ENGINE (MG/HP-HR)

Test No.	Engine Speed, rpm	Load, %	Emission Rate, mg/hp-hr									
			Formaldehyde	Acetaldehyde	Acrolein	Propionaldehyde	Acetone	Crotonaldehyde	Isobutyraldehyde	MEK	Benzaldehyde	Hexanaldehyde
3-1	500	2	1350	330	ND	150	ND	ND	90	110	ND	ND
3-2	1000	2	620	180	ND	106	ND	ND	62	100	98	330
3-5	1500	2	588	166	ND	83	ND	ND	49	49	48	304
3-8	2500	2	568	153	18	82	ND	ND	42	32	96	240
3-3	1000	50	0.6	4.8	1.2	2.4	ND	1.2	1.9	1.8	2.2	1.4
3-6	1500	50	2.5	0.7	ND	ND	ND	ND	0.2	2.1	1.2	1.4
3-9	2500	50	14.1	21.2	ND	9.6	ND	1.1	6.2	1.1	2.2	3.5
3-4	1000	100	5.9	1.0	ND	0.6	ND	ND	ND	1.0	0.7	3.7
3-7	1500	100	11.6	3.8	ND	1.4	ND	ND	ND	ND	1.0	4.3
3-10	2500	100	11.7	1.1	1.3	0.5	ND	0.9	1.6	0.9	3.6	0.8

TABLE 19. ALDEHYDE EMISSION RATES FROM A
PERKINS 4.203.2 DIESEL ENGINE (MG/HR)

Test No.	Engine Speed, rpm	Load, %	Aldehyde Emission Rate, mg/hr									
			Formaldehyde	Acetaldehyde	Acrolein	Propionaldehyde	Acetone	Crotonaldehyde	Isobutyraldehyde	MEK	Benzaldehyde	Hexanaldehyde
3-1	500	2	135	33	ND	15	ND	ND	9	11	ND	ND
3-2	1000	2	310	90	ND	53	ND	ND	31	50	49	165
3-5	1500	2	470	133	ND	66	ND	ND	39	39	38	243
3-8	2500	2	739	199	23	106	ND	ND	55	41	125	312
3-3	1000	50	8	63	15	31	ND	15	25	24	28	18
3-6	1500	50	49	13	ND	ND	ND	ND	4	40	23	27
3-9	2500	50	352	531	ND	240	ND	28	155	28	55	88
3-4	1000	100	143	25	ND	15	ND	ND	ND	24	16	90
3-7	1500	100	426	141	ND	50	ND	ND	ND	ND	38	160
3-10	2500	100	541	49	60	25	ND	42	72	43	168	36

TABLE 20. ALDEHYDE EMISSION RATES FROM A
PERKINS 4.203.2 DIESEL ENGINE (PPM)

Test No.	Engine Speed, rpm	Load, %	Aldehyde Emission, ppm									
			Formaldehyde	Acetaldehyde	Acrolein	Propionaldehyde	Acetone	Crotonaldehyde	Isobutyraldehyde	MEK	Benzaldehyde	Hexanaldehyde
3-1	500	2	2.84	0.48	ND	0.16	ND	ND	0.08	0.10	ND	ND
3-2	1000	2	2.99	0.59	ND	0.27	ND	ND	0.13	0.20	0.13	0.48
3-5	1500	2	2.91	0.56	ND	0.21	ND	ND	0.10	0.10	0.07	0.45
3-8	2500	2	3.17	0.58	0.05	0.24	ND	ND	0.10	0.07	0.15	0.40
3-3	1000	50	0.08	0.43	0.08	0.16	ND	0.06	0.10	0.10	0.08	0.05
3-6	1500	50	0.30	0.06	ND	ND	ND	ND	0.01	0.10	0.04	0.05
3-9	2500	50	1.51	1.55	ND	0.53	ND	0.05	0.28	0.05	0.07	0.11
3-4	1000	100	1.46	0.17	ND	0.08	ND	ND	ND	0.10	0.04	0.27
3-7	1500	100	2.61	0.59	ND	0.16	ND	ND	ND	ND	0.07	0.29
3-10	2500	100	2.28	0.14	0.13	0.05	ND	0.08	0.13	0.08	0.20	0.05

TABLE 21. SUMMARY OF ALDEHYDE AND KETONE EMISSION RATES
FROM A DEUTZ F3L 912W AND PERKINS 4.203.2 ENGINES
OPERATED ON MIL-F-46162A(MR) FUEL, AL-722-5

<u>Speed</u>	<u>Load, %</u>	<u>Total Aldehydes,* mg/hp-hr</u>		<u>Percent Formaldehyde in Total Aldehydes</u>	
		<u>Deutz</u>	<u>Perkins</u>	<u>Deutz</u>	<u>Perkins</u>
Idle	2	215	2030	12	67
Intermediate	2	60	1496	20	41
Peak Torque	2	84	1287	21	46
Rated	2	787	1231	17	46
Intermediate	50	3.4	17.5	38	3
Peak Torque	50	5.2	8.1	37	31
Rated	50	8.5	59.0	46	24
Intermediate	100	1.7	12.9	18	46
Peak Torque	100	2.1	22.1	29	52
Rated	100	1.6	22.4	25	52

*Total aldehydes are defined as the numerical sum of the individual emission rates for formaldehyde, acetaldehyde, acrolein, propionaldehyde, acetone, crotonaldehyde, isobutyraldehyde, methyl ethyl ketone, benzaldehyde, and hexanaldehyde.

3. Phenols

During this program, exhaust samples were collected for phenols analysis using procedures developed by Southwest Research Institute for the Environmental Protection Agency. Analysis of these samples by gas chromatography indicated either no phenols or only trace phenols with both engines. The detection limits of the phenols as measured by this method are presented in Table 23.

4. Diesel Odor Analysis System (DOAS) Odor

DOAS odor results from both engines are presented in Table 23. The DOAS from the Perkins 4.203.2 engine was generally higher (TIA 2.2 ± 0.3) than the Deutz F3L 912W (TIA 1.7 ± 0.3). No general trends were apparent as a function of engine speed or load for either engine.

The higher Total Aroma of Intensity (TIA) values observed with Perkins 4.203.2 were not surprising, considering that the Perkins also had higher unburned hydrocarbons, aldehydes and ketones, and organic sulfides than the Deutz F3L 912W engine. These species are all thought to contribute to or be an indicator of diesel exhaust odor.

TABLE 22. ORGANIC SULFIDE EMISSION RATES FROM PERKINS 4.203.2 DIESEL ENGINE (mg/hr)

<u>Test No.</u>	<u>Engine Speed</u>	<u>Load, %</u>	<u>Carbonyl Sulfide</u>	<u>Dimethyl Sulfide</u>	<u>Diethyl Sulfide</u>	<u>Dimethyl Disulfide</u>
3-1	500	2	0.90	ND	ND	ND
3-2	1000	2	3.41	ND	ND	ND
3-5	1500	2	4.77	ND	ND	ND
3-8	2500	2	45.08	ND	2.59	ND
3-3	1000	50	0.58	ND	ND	ND
3-6	1500	50	0.94	ND	ND	ND
3-9	2500	50	16.33	ND	1.55	ND
3-4	1000	100	1.00	ND	ND	ND
3-7	1500	100	1.32	ND	0.43	ND
3-10	2500	100	2.94	ND	3.42	ND

TABLE 23. DIESEL ODOR ANALYSIS SYSTEM (DOAS) RESULTS FOR DEUTZ F3L 912W AND PERKINS 4.203.2 DIESEL ENGINES

<u>Engine Speed</u>	<u>Engine Load, %</u>	<u>Total Aroma of Intensity (TIA)</u>	
		<u>Deutz F3L 912W</u>	<u>Perkins 4.203.2</u>
Idle	2	1.55	2.10
Intermediate	2	1.55	2.17
Peak Torque	2	1.71	2.07
Rated	2	1.92	2.08
Intermediate	50	1.77	2.21
Peak Torque	50	1.62	2.28
Rated	50	1.71	2.52
Intermediate	100	1.72	2.17
Peak Torque	100	1.41	2.57
Rated	100	1.38	--- ^a

^aSample contaminated

V. SUMMARY

This section summarizes emission results from the Deutz F3L 912W and Perkins 4.203.2 engines for Groups I, II, and III emissions. The data for the Group I emissions produced several general trends and observations:

- Both engines produced higher BSHC, BSCO, and BSNO_x at low-load conditions, regardless of speed.
- At constant load, BSHC and BSCO increased with increasing speed; BSNO_x showed mixed trends.
- At constant speed, BSHC, BSCO, and BSNO_x increased with decreasing load for both engines.
- The Perkins 4.203.2 engine had higher HC, CO, and NO_x brake specific (g/hp-hr) and mass (g/hr) emission rates than the Deutz F3L 912W.

Results of Group II emissions for particulate, sulfur dioxide, and sulfate also produced some general trends, and are summarized below:

- At constant speed, particulate and sulfur dioxide emission rates increased with increasing load.
- Less than 5 percent of fuel sulfur was converted to sulfate for both engines.
- At constant intermediate, peak torque, and rated speeds, sulfate increased with increasing load.
- In most cases, particulate brake specific emission rates were higher on the Perkins 4.203.2 engine. Sulfur dioxide mass emission rates were generally proportional to fuel consumed.

Aldehydes, organic sulfides, DOAS odor, and phenols (Group III) were measured on selected modes. These results are summarized below:

- Formaldehyde concentrations generally accounted for 30-50 percent of the aldehydes and ketones detected.
- Formaldehyde concentrations were less than 0.5 ppm for all test conditions for the Deutz F3L 912W engine and less than 3.2 ppm for all test conditions with the Perkins 4.203.2 engine.
- Brake specific aldehyde emission rates increased with a decrease in load at constant speed for the Deutz F3L 912W engine.
- In general, at constant load and aldehyde and ketone mass, emission rates increased with an increase in speed, except at low load for the Perkins engine.
- No phenols were found above the minimum detection limit for the two engines tested.
- Carbonyl sulfide was the predominate organic sulfide measured with the Perkins 4.203.2 engine; no organic sulfides were detected with the Deutz F3L 912W engine.
- At constant load, carbonyl sulfide mass emission rates increased with an increase in engine speed with the Perkins 4.203.2 engine.
- With the Perkins 4.302.2 engine, at constant speed, the carbonyl sulfide mass emission rates decreased with an increase in load.
- The Diesel Odor Analysis System (DOAS) results from the Perkins 4.203.2 engine were generally higher ($TIA \approx 2.2 \pm 0.3$) than the Deutz F3L 912W ($TIA \approx 1.70 \pm 0.3$). No general trends for DOAS odor were apparent as a function of engine speed or load for either engine.

VI. RECOMMENDATIONS

As a result of this program, several items have been identified as potential areas of additional work. These are summarized below:

1. Most engine emissions appear to be greatest at low loads regardless of the engine speed. Forklifts generally operate at low load and under essentially continual transient conditions. Previous experience has indicated that steady-state data cannot always predict transient emissions, particularly on a low-duty cycle. Since a "forklift cycle" is not currently available, it is recommended that an RFP issued by MERADCOM (RFP DAAK70-83-Q-0107 titled "Measurement of Pollutants from Diesel Engine Forklift Trucks During Operations in an Ammunition Storage Area") be modified to include monitoring engine parameters such as engine speed, fuel and exhaust temperatures. This would allow development of a "forklift cycle" at a minimal cost to MERADCOM, since forklift trucks, fuel, drivers, operators, and facilities will be available all at one time at one place and could be performed concurrently.

The availability of this transient cycle would allow determining emission rates based on a cycle developed from data collected during field operations. It is also consistent with EPA's philosophy, that is, requiring all heavy-duty diesel engines to be certified using the EPA heavy-duty engine transient cycle. Virtually all forklift engine manufacturers also produce heavy-duty engines and are quite familiar with the transient cycle.

2. Initially, it was planned to use 1-percent sulfur fuel, i.e., MIL-F-46162B (ME); however, due to time constraints and lack of immediate availability of the MIL-F-46162B(ME) fuel, the MERADCOM Project Manager approved the use of MIL-F-46162A(MR) for this program (at 0.35-percent sulfur). During this program, there were several discussions with MERADCOM regarding the effect of fuel sulfur level on emissions, particularly sulfur dioxide, sulfate, and trace organic sulfides. It is generally agreed that an increase in fuel sulfur level will produce a corresponding proportionate increase in sulfur dioxide and sulfate, although experimental data to confirm this are not available. As mentioned earlier, the nature and quantity of the trace organic sulfides may be influenced by the specific sulfur additive that is used

to increase the fuel sulfur level. Also, the question of the influence of natural versus added sulfur has not been investigated, at least to our knowledge.

3. After MERADCOM has established the test protocol and specifications for diesel forklift acceptance to MERADCOM, it is quite likely that several engine manufacturers may have diesel engines that are acceptable in every manner except emissions. These manufacturers may wish to add after-treatment devices (i.e., catalytic traps) to their engines to reduce emissions, particularly if this is already allowed in Great Britain. These devices are reportedly effective and are currently used in handling hazardous materials in England.

Although these devices may allow a nonconforming engine to meet the emissions specification during an acceptance test, it should be demonstrated to MERADCOM that these devices have demonstrated durability during typical forklift operations and that on-site catalytic trap regeneration is possible. Other areas of possible concern would be the use of after-treatment devices with the MIL-F-46162B(ME) high-sulfur fuel and its influence on sulfate formation. In addition, limited work may be warranted to investigate the formation of selected unregulated emissions (i.e., sulfate, aldehydes, odor) during engine malfunctions, such as plugged air cleaner, high exhaust back-pressure, engine overfueling, and injection pump mistiming.

4. After MERADCOM has established the emission limits and test procedures for diesel forklift purchase specifications, it should be of concern to MERADCOM to develop a level confidence that ensures that engines purchased will meet the emission standards. There are essentially two variables that affect emission rates. The first variable is test-to-test variability and is influenced primarily by the analytical instrumentation, engine reproducibility, etc. It is likely that EPA has some data to provide some indication of this variability on large heavy-duty diesel engines. We are not aware of any data available for test-to-test variability on forklift-size diesel engines. If this is not available, MERADCOM may wish to conduct replicate 13-mode (or transient forklift if the cycle is available) to determine standard deviation on one or more candidate diesel engines to establish confidence limits on this size engine.

The second, and probably most critical, is the engine-to-engine variability of production engines. Again, EPA may have data available on the engine-to-engine variability during certification of heavy-duty engines, but extrapolation to small engines may not be appropriate. MERADCOM may wish to include in the purchase specifications that a certain percentage of production engines (i.e., four out of five engines) pass the emission tests, or alternatively, randomly select production engines for an emissions audit (test).

VII. REFERENCES

1. Code of Federal Regulations, Title 40, Part 86, Subpart D, "Emission Regulations for New Gasoline-Fueled and Diesel Heavy-Duty Engines; Gaseous Exhaust Test Procedures," pp. 428-460, July 1, 1982.
2. Smith, L. R., Parness, M. A., Fanick, E. R., and Dietzmann, H. E., "Analytical Procedures for Characterizing Unregulated Emissions From Vehicles Using Middle-Distillate Fuels," EPA/600-2-80-068, April 1980.
3. CRC-APRAC Project No. CAPI-1-64, "Development and Evaluation of a Method for Measurement of Diesel Exhaust Odor Using a Diesel Odor Analysis System (DOAS)," January 1979.

APPENDIX

13-MODE EMISSION RESULTS

- Deutz F3L 912W Engine
- Perkins 4.203.2 Engine

PREVIOUS PAGE
IS BLANK

13-MODE FEDERAL DIESEL EMISSION CYCLE 1979

ENGINE:DEUTZ MODEL F3L912SW S/N 6498515 13 MODE
TEST-1 FUEL:EM-544-F PROJECT:05-6800-175 DATE:02/09/83

MODE	POWER PCT	ENGINE SPEED COND / RPM	TORQUE OBS LB-FT	POWER OBS BHP	FUEL FLOW LB/MIN	AIR FLOW LB/MIN	INTAKE HUMID GR/LB	NOX CORR FACT	HC PPM	MEASURED			CALCULATED			MODE
										CO PPM	CO2 PCT	NOX PPM	HC PPM	GRAMS / HOUR CO	GRAMS / HOUR NOX	
1	2	IDLE / 600.	0.	0	.023	2.80	56.	.927	90.	129.	1.65	99.	3.	10.	12.	1
2	25	INTER / 1600.	3.	.8	.052	5.23	49.	.922	65.	125.	2.20	114.	4.	16.	22.	2
3	50	INTER / 1600.	28.	8.4	.100	5.22	63.	.983	45.	95.	3.90	293.	3.	13.	66.	3
4	75	INTER / 1600.	56.	17.2	.130	5.04	53.	.935	50.	54.	5.38	387.	5.	7.	79.	4
5	100	INTER / 1600.	84.	25.6	.178	5.05	58.	.964	50.	82.	7.95	585.	3.	10.	114.	5
6	100	INTER / 1600.	112.	34.0	.230	4.99	63.	.980	72.	151.	10.25	402.	5.	19.	79.	6
7	100	IDLE / 600.	0.	0	.023	2.80	56.	.927	90.	129.	1.65	99.	3.	10.	12.	7
8	75	RATED / 2650.	83.	41.7	.282	7.59	60.	.965	106.	209.	8.24	437.	11.	39.	129.	8
9	50	RATED / 2650.	62.	31.1	.250	7.82	56.	.958	113.	177.	7.21	470.	11.	34.	140.	9
10	25	RATED / 2650.	42.	21.2	.193	7.62	47.	.921	110.	214.	5.69	308.	11.	40.	86.	10
11	2	RATED / 2650.	21.	10.6	.158	7.84	58.	.953	130.	255.	4.30	243.	13.	51.	76.	11
12	2	RATED / 2650.	1.	.7	.100	7.56	45.	.913	160.	356.	3.39	129.	13.	57.	31.	12
13	2	IDLE / 600.	0.	0	.023	2.80	56.	.927	90.	129.	1.65	99.	3.	10.	12.	13

MODE	CALCULATED						F/A	F/A	WET HC CORR FACT	"PHI"	F/A	F/A	PCT MEAS	POWER CORR FACT	BSFC CORR LB/HP-HR	MODAL WEIGHT FACTOR	MODE
	GRAMS/LB-FUEL		GRAMS/BHP-HR		F/A DRY MEAS	STOICH											
	HC	CO	NOX	HC			CO	NOX									
1	2.48	7.09	8.23	*****	*****	*****	.0084	.0690	.122	.983	.0079	-5.6	-5.6	1.000	*****	.067	1
2	1.36	5.17	7.10	5.26	20.05	27.52	.0099	.0690	.144	.978	.0105	5.5	5.5	1.023	3.788	.080	2
3	.54	2.23	11.03	.39	1.59	7.88	.0193	.0690	.280	.963	.0184	-5.1	-5.1	1.008	.709	.080	3
4	.44	.92	10.06	.20	.42	4.56	.0260	.0690	.376	.951	.0251	-3.3	-3.3	1.023	.443	.080	4
5	.31	.95	10.61	.13	.40	4.44	.0356	.0690	.516	.931	.0367	3.1	3.1	1.014	.412	.080	5
6	.35	1.35	5.75	.14	.55	2.33	.0465	.0690	.674	.913	.0469	.8	.8	1.007	.403	.080	6
7	2.48	7.09	8.23	*****	*****	*****	.0084	.0690	.122	.983	.0079	-5.6	-5.6	1.000	*****	.067	7
8	.63	2.32	7.64	.25	.94	3.09	.0374	.0690	.543	.928	.0381	1.7	1.7	1.041	.389	.080	8
9	.76	2.25	9.32	.36	1.08	4.49	.0322	.0690	.467	.936	.0335	3.9	3.9	1.032	.467	.080	9
10	.92	3.44	7.43	.50	1.88	4.06	.0255	.0690	.370	.949	.0266	4.3	4.3	1.040	.526	.080	10
11	1.42	5.40	8.00	1.27	4.84	7.17	.0204	.0690	.295	.960	.0203	-2	-2	1.032	.868	.080	11
12	2.18	9.50	5.13	19.73	86.05	46.47	.0133	.0690	.193	.968	.0162	21.5	21.5	1.031	8.783	.080	12
13	2.48	7.09	8.23	*****	*****	*****	.0084	.0690	.122	.983	.0079	-5.6	-5.6	1.000	*****	.067	13

CYCLE COMPOSITE USING 13-MODE WEIGHT FACTORS

BSHC ----- = .454 GRAM/BHP-HR
BSC0 ----- = 1.627 GRAM/BHP-HR
BSNOX ----- = 4.445 GRAM/BHP-HR
BSHC + BSNOX = 4.899 GRAM/BHP-HR
CORR. BSFC - = .529 LBS/BHP-HR

13-MODE FEDERAL DIESEL EMISSION CYCLE 1979

ENGINE: PERKINS MODEL 4.203.2
TEST-1 FUEL: EM-544-F PROJECT: 05-6800-175 DATE: 3/2/83

MODE	POWER		ENGINE SPEED	TORQUE OBS LB-FT	POWER		FUEL FLOW LB/MIN	AIR FLOW LB/MIN	INTAKE HUMID GR/LB	NOX CORR FACT	MEASURED				CALCULATED				MODE
	PCT	COND / RPM			OBS BHP	OBS BHP					HC PPM	CO PPM	CO2 PCT	NOX PPM	HC CO	NOX			
1	1	IDLE / 750.		0.	0.	0.	.015	2.74	39.	.889	824.	437.	1.51	128.	21.	22.	9.	1	
2	2	INTER / 1500.		3.	.8	.8	.050	5.68	47.	.918	720.	624.	1.80	195.	52.	89.	42.	2	
3	25	INTER / 1500.		34.	9.8	9.8	.093	5.66	56.	.974	960.	494.	3.45	447.	70.	71.	102.	3	
4	50	INTER / 1500.		68.	19.5	19.5	.140	5.62	53.	.951	728.	361.	5.46	675.	52.	50.	145.	4	
5	75	INTER / 1500.		104.	29.6	29.6	.200	5.81	49.	.950	540.	274.	7.67	785.	41.	39.	173.	5	
6	100	INTER / 1500.		129.	36.8	36.8	.240	5.55	64.	.982	620.	303.	9.69	859.	45.	41.	186.	6	
7		IDLE / 750.		0.	0.	0.	.015	2.74	39.	.889	824.	437.	1.51	128.	21.	22.	9.	7	
8	100	RATED / 2500.		97.	46.3	46.3	.342	8.07	58.	.970	464.	790.	9.69	482.	48.	152.	146.	8	
9	75	RATED / 2500.		81.	38.8	38.8	.300	8.19	52.	.961	592.	494.	7.85	402.	65.	103.	131.	9	
10	50	RATED / 2500.		53.	25.0	25.0	.220	8.05	56.	.963	704.	790.	5.69	273.	76.	164.	89.	10	
11	25	RATED / 2500.		26.	12.5	12.5	.158	8.13	61.	.987	1104.	828.	4.10	273.	115.	168.	89.	11	
12	2	RATED / 2500.		3.	1.3	1.3	.097	8.15	63.	1.000	912.	1348.	2.47	167.	91.	266.	54.	12	
13		IDLE / 750.		0.	0.	0.	.015	2.74	39.	.889	824.	437.	1.51	128.	21.	22.	9.	13	

MODE	CALCULATED		F/A		F/A		F/A		F/A		F/A		F/A		F/A		F/A		F/A		F/A		MODE
	HC	CO	NOX	HC	CO	NOX	HC	CO	NOX	HC	CO	NOX	HC	CO	NOX	HC	CO	NOX	HC	CO	NOX	HC	
1	23.20	24.52	10.42	68.76	118.45	55.43	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	1
2	17.19	29.61	13.86	7.19	7.24	10.42	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	0.089	2
3	12.51	12.61	18.14	2.69	2.56	7.44	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	3
4	6.23	5.95	17.28	1.37	1.31	5.84	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	0.0347	4
5	3.38	3.25	14.41	1.23	1.11	5.06	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	0.0436	5
6	3.13	2.84	12.92	1.04	0.98	4.82	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	0.0355	6
7	23.20	24.52	10.42	68.76	118.45	55.43	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	7
8	2.34	7.39	7.14	1.04	3.28	3.16	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	0.027	8
9	3.62	5.70	7.27	1.68	2.65	3.38	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	0.0369	9
10	5.76	12.42	6.75	3.04	6.56	3.56	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	0.0276	10
11	12.12	17.70	9.40	9.21	13.45	7.14	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	0.0197	11
12	15.73	45.89	9.27	73.00	12.93	43.02	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	0.0120	12
13	23.20	24.52	10.42	68.76	118.45	55.43	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	0.055	13

CYCLE COMPOSITE USING 13-MODE WEIGHT FACTORS

BSHC ----- = 3.215 GRAM/BHP-HR
BSCO ----- = 5.438 GRAM/BHP-HR
BSNOX ----- = 5.361 GRAM/BHP-HR
BSHC + BSNOX = 8.577 GRAM/BHP-HR
CORR. BSFC = .495 LBS/BHP-HR

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE

DEFENSE DOCUMENTATION CTR
CAMERON STATION 12
ALEXANDRIA VA 22314

DEPT. OF DEFENSE
ATTN: DASD-LMM (MR DYCKMAN) 1
WASHINGTON DC 20301

CDR
DEFENSE FUEL SUPPLY CTR
ATTN: DFSC-T (MR. MARTIN) 1
CAMERON STA
ALEXANDRIA VA 22314

DOD
ATTN: DUSDRE (RAT) (Dr. Dix) 1
WASHINGTON DC 20301

DEFENSE ADVANCED RES PROJ AGENCY
DEFENSE SCIENCES OFC 1
1400 WILSON BLVD
ARLINGTON VA 22209

DEPARTMENT OF THE ARMY

HQ, DEPT OF ARMY
ATTN: DALO-TSE (COL NAJERA) 1
DAMA-CSS-P (DR BRYANT) 1
DAMA-ARZ-E (DR CHURCH) 1
WASHINGTON DC 20310

CDR
U.S. ARMY BELVOIR RESEARCH AND
DEVELOPMENT CENTER
ATTN: STRBE-VF 10
STRBE-WC 2
STRBE-G 3
FORT BELVOIR VA 22060

CDR
US ARMY MATERIEL DEVEL &
READINESS COMMAND
ATTN: DRCLD 1
DRCDMR (MR GREINER) 1
DRCMD-ST (DR HALEY) 1
DRCQA-E 1
DRCDE-SG 1
DRCDSM-WCS (MR SCHEUBLE) 1
5001 EISENHOWER AVE
ALEXANDRIA VA 22333

CDR
US ARMY TANK-AUTOMOTIVE CMD
ATTN: DRSTA-GSPE 1
DRSTA-RG 1
DRSTA-NS (DR DOBBS) 1
DRSTA-MTC 1
DRSTA-G 1
DRSTA-M 1
DRSTA-GBP (MR MCCARTNEY) 1
WARREN MI 48090

DIRECTOR
US ARMY MATERIEL SYSTEMS
ANALYSIS AGENCY
ATTN: DRXSY-CM 1
DRXSY-S 1
DRXSY-L 1
ABERDEEN PROVING GROUND MD 21005

HQ, 172D INFANTRY BRIGADE (ALASKA)
ATTN: AFZT-DI-L 1
AFZT-DI-M 1
DIRECTORATE OF INDUSTRIAL
OPERATIONS
FT RICHARDSON AK 99505

CDR
US ARMY GENERAL MATERIAL &
PETROLEUM ACTIVITY
ATTN: STSGP-F 1
STSGP (COL CLIFTON) 1
NEW CUMBERLAND ARMY DEPOT
NEW CUMBERLAND PA 17070

CDR
TOBYHANNA ARMY DEPOT
ATTN: SDSTO-TP-S 1
TOBYHANNA PA 18466

CDR
US ARMY DEPOT SYSTEMS CMD
ATTN: DRSDS 1
CHAMBERSBURG PA 17201

CDR
US ARMY WATERVLIET ARSENAL
ATTN: SARWY-RDD 1
WATERVLIET NY 12189

CDR
US ARMY LEA
ATTN: DALO-LEP 1
NEW CUMBERLAND ARMY DEPOT
NEW CUMBERLAND PA 17070

CDR
US ARMY FOREIGN SCIENCE & TECH
CENTER
ATTN: DRXST-MT1 1
FEDERAL BLDG
CHARLOTTESVILLE VA 22901

CDR
DARCOM MATERIEL READINESS
SUPPORT ACTIVITY (MRSA)
ATTN: DRXMD-MD 1
LEXINGTON KY 40511

HQ, US ARMY T&E COMMAND
ATTN: DRSTE-TO-O 1
ABERDEEN PROVING GROUND MD 21005

HQ, US ARMY TROOP SUPPORT COMMAND
ATTN: DRSTS-MEG (2) 1
4300 GOODFELLOW BLVD
ST LOUIS MO 63120

DEPARTMENT OF THE ARMY
CONSTRUCTION ENG RSCH LAB
ATTN: CERL-EM 1
CERL-ZT 1
CERL-EH 1
P O BOX 4005
CHAMPAIGN IL 61820

HQ
US ARMY TRAINING & DOCTRINE CMD
ATTN: ATCD-S 1
FORT MONROE VA 23651

CDR
US ARMY TRANSPORTATION SCHOOL
ATTN: ATSP-CD-MS 1
FORT EUSTIS VA 23604

CDR
US ARMY MATERIEL ARMAMENT
READINESS CMD
ATTN: DRSAR-LEM 1
ROCK ISLAND ARSENAL IL 61299

CDR
US ARMY COLD REGION TEST CENTER
ATTN: STECR-TA 1
APO SEATTLE 98733

HQ, DEPT. OF ARMY
ATTN: DAEN-DRM 1
WASHINGTON DC 20310

CDR
US ARMY RES & STDZN GROUP
(EUROPE)
ATTN: DRXSN-UK-RA 1
BOX 65
FPO NEW YORK 09510

CDR
US ARMY FORCES COMMAND
ATTN: AFLG-REG 1
AFLG-POP 1
FORT MCPHERSON GA 30330

CDR
US ARMY YUMA PROVING GROUND
ATTN: STEYP-MT (MR DOEBBLER) 1
YUMA AZ 85364

PROJ MGR, ABRAMS TANK SYS, DARCOM
ATTN: DRCPM-GCM-S 1
WARREN MI 48090

PROJ MGR, FIGHTING VEHICLE SYS
ATTN: DRCPM-FVS-SE 1
WARREN MI 48090

PROJ MGR, M60 TANK DEVELOPMENT
US ARMY TANK-AUTOMOTIVE CMD (TACCM)
ATTN: USMC-LNO, MAJ. VARELLA 1
WARREN MI 48090

PROJ MGR, M113/M113A1 FAMILY
VEHICLES
ATTN: DRCPM-M113 1
WARREN MI 48090

PROJ MGR, MOBILE ELECTRIC POWER
ATTN: DRCPM-MEP-TM 1
7500 BACKLICK ROAD
SPRINGFIELD VA 22150

PROJ MGR, IMPROVED TOW VEHICLE
US ARMY TANK-AUTOMOTIVE CMD
ATTN: DRCPM-ITV-T 1
WARREN MI 48090

CDR
US ARMY EUROPE & SEVENTH ARMY
ATTN: AEAGG-FMD 1
AEAGD-TE 1
APO NY 09403

PROJ MGR, PATRIOT PROJ OFC
US ARMY DARCOM
ATTN: DRCPM-MD-T-G 1
REDSTONE ARSENAL AL 35809

CDR
THEATER ARMY MATERIAL MGMT
CENTER (200TH)
DIRECTORATE FOR PETROL MGMT
ATTN: AEAGD-MM-PT-Q 1
ZWEIBRUCKEN
APO NY 09052

CDR
US ARMY RESEARCH OFC
ATTN: DRXRO-EG (DR MANN) 1
DRXRO-CB 1
P O BOX 12211
RSCH TRIANGLE PARK NC 27709

CDR
US ARMY QUARTERMASTER SCHOOL
ATTN: ATSM-CDM 1
ATSM-TNG-PT 1
FORT LEE VA 23801

HG, US ARMY ARMOR CENTER
ATTN: ATZK-CD-SB 1
FORT KNOX KY 40121

CDR
101ST AIRBORNE DIV (AASLT)
ATTN: AFZB-KE-J 1
AFSB-KE-DMMC (CPT MORRIS) 1
FORT CAMPBELL KY 42223

CDR
US ARMY LOGISTICS CTR
ATTN: ATCL-MS (MR A MARSHALL) 1
FORT LEE VA 23801

CDR
US ARMY FIELD ARTILLERY SCHOOL
ATTN: ATSF-CD 1
FORT SILL OK 73503

CDR
US ARMY ENGINEER SCHOOL
ATTN: ATZE-CDM 1
FORT BELVOIR VA 22060

CDR
US ARMY INFANTRY SCHOOL
ATTN: ATSH-CD-MS-M 1
FORT BENNING GA 31905

PROJ MGR M60 TANK DEVELOP.
ATTN: DRCPM-M60-E 1
WARREN MI 48090

DEPARTMENT OF THE NAVY

CDR
NAVAL AIR PROPULSION CENTER
ATTN: PE-72 (MR D'ORAZIO) 1
P O BOX 7176
TRENTON NJ 06828

CDR
NAVAL SEA SYSTEMS CMD
ATTN: CODE 05M4 (MR R LAYNE) 1
WASHINGTON DC 20362

CDR
DAVID TAYLOR NAVAL SHIP R&D CTR
ATTN: CODE 2830 (MR G BOSMAJIAN) 1
CODE 2705.1 (MR STRUCKO) 1
ANNAPOLIS MD 21402

JOINT OIL ANALYSIS PROGRAM -
TECHNICAL SUPPORT CTR 1
BLDG 780
NAVAL AIR STATION
PENSACOLA FL 32508

DEPARTMENT OF THE NAVY
HQ, US MARINE CORPS
ATTN: LPP 1
WASHINGTON DC 20380

CDR
NAVAL FACILITIES ENGR CTR
ATTN: CODE 120 (MR R BURRIS) 1
200 STOWWALL ST
ALEXANDRIA VA 22322

CHIEF OF NAVAL RESEARCH
ATTN: CODE 473 1
ARLINGTON VA 22217

CDR
NAVAL AIR ENGR CENTER
ATTN: CODE 92727 1
LAKEHURST NJ 08733

CDR, NAVAL MATERIEL COMMAND
ATTN: MAT-08E (MR ZIEM) 1
CP6, RM 606
WASHINGTON DC 20360

CDR
MARINE CORPS LOGISTICS SUPPORT
BASE ATLANTIC
ATTN: CODE P841 1
ALBANY GA 31704

DEPARTMENT OF THE AIR FORCE

HQ, USAF
ATTN: LEYSF (COL CUSTER) 1
WASHINGTON DC 20330

HQ AIR FORCE SYSTEMS CMD
ATTN: AFSC/DLF 1
ANDREWS AFB MD 20334

CDR
US AIR FORCE WRIGHT AERONAUTICAL
LAB
ATTN: AFWAL/POSF (MR CHURCHILL) 1
WRIGHT-PATTERSON AFB OH 45433

CDR
SAN ANTONIO AIR LOGISTICS
CTR
ATTN: SAALC/SFQ (MR MAKRIS) 1
SAALC/MMPRR 1
KELLY AIR FORCE BASE TX 78241

CDR
WARNER ROBINS AIR LOGISTIC
CTR
ATTN WR-ALC/MMIRAB-1 (MR GRAHAM) 1
ROBINS AFB GA 31098

OTHER GOVERNMENT AGENCIES

DIRECTOR
NATL MAINTENANCE TECH SUPPORT
CTR 2
US POSTAL SERVICE
NORMAN OK 73069

NATIONAL AERONAUTICS AND
SPACE ADMINISTRATION
LEWIS RESEARCH CENTER
MAIL STOP 5420
(ATTN: MR. GROBMAN) 1
CLEVELAND OH 44135

NATIONAL AERONAUTICS AND
SPACE ADMINISTRATION
VEHICLE SYSTEMS AND ALTERNATE
FUELS PROJECT OFFICE
ATTN: MR CLARK 1
LEWIS RESEARCH CENTER
CLEVELAND OH 44135

US DEPARTMENT OF ENERGY
CE-131.2, GB-096
ATTN: MR ECKLUND 1
FORRESTAL BLDG.
1000 INDEPENDENCE AVE, SW
WASHINGTON DC 20585

SCI & TECH INFO FACILITY
ATTN: NASA REP (SAK/DL) 1
P O BOX 8757
BALTIMORE/WASH INT AIRPORT MD 21240

ENVIRONMENTAL PROTECTION AGCY
OFFICE OF MOBILE SOURCES
MAIL CODE ANR-455
(MR. G. KITTREDGE) 1
401 M ST., SW
WASHINGTON DC 20460

ATE
LME